



MARK	ECN NO.	Modify	Approve	DATE


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

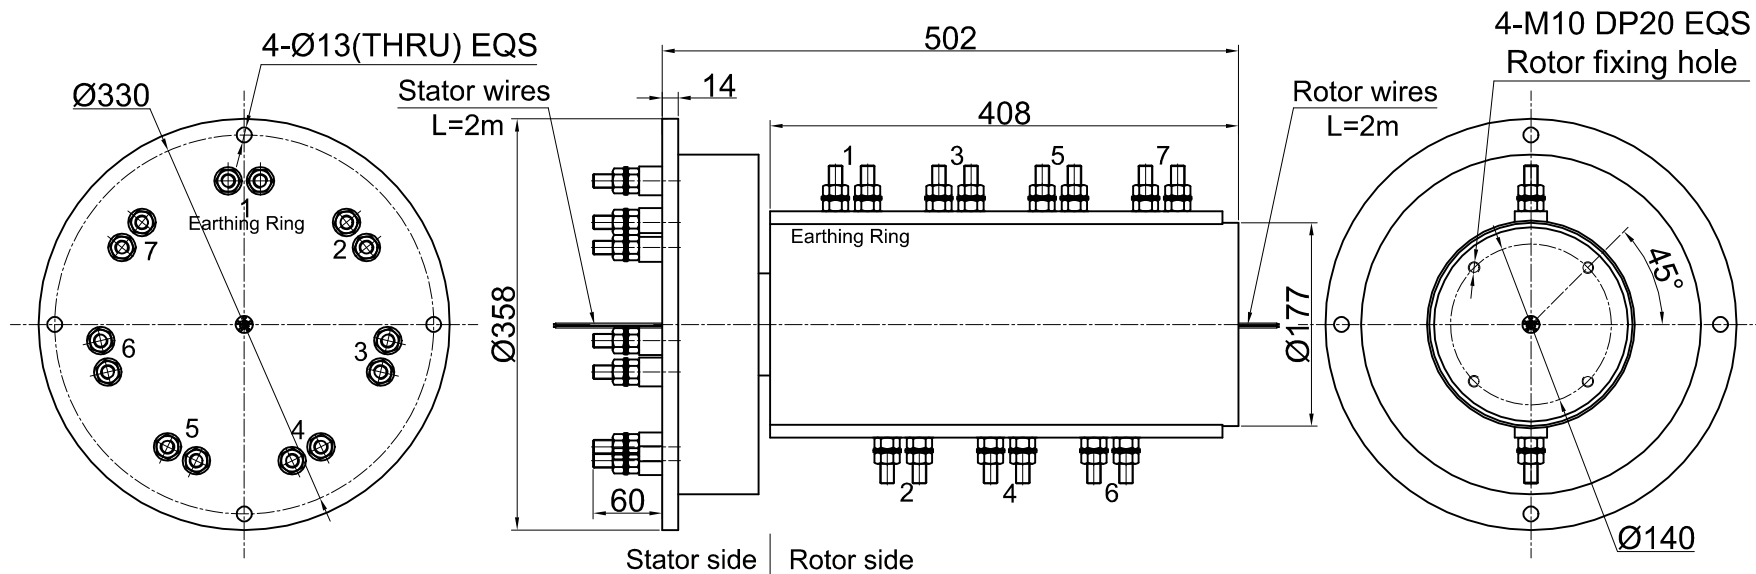

7 Rings 400A
14-M12 Brass terminal post
(Two brass terminal posts in
parallel, 400A current carrying)



12 Rings 16A
12-AWG14# Teflon Wires

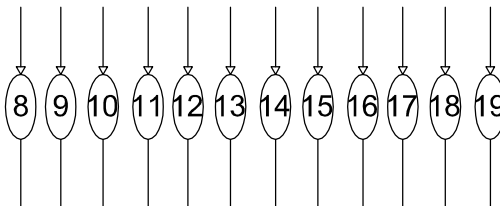

Electrical Specifications

1 Rings	19	2 Current	Power module: 7 Rings 400A + 12 Rings 16A
3 Voltage	0~380VAC / VDC		
4 Insulation Resistance	≥500MΩ@500VDC		
5 Electrical noise	Max. 10mΩ		
6 Dielectric strength	500VAC@50Hz(Control Ring) 2000VAC@50Hz(Power Ring)		

Mechanical Specification

7 Speed	0~10 rpm	8 Torque	MAX 10 N·m
---------	----------	----------	------------

Environmental adaptability

9 Working temperature	-30℃~+50℃	10 Storage temperature	-35℃~+55℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g, 11ms, Half sine wave, Vertical 3 times, Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Insulating material
16 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		7 Rings 400A + 12 Rings 16A	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26071504	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6	±0.1	SIZE	A
		6 ≤ X < 30	±0.2	R E V.	A / 0
		30 ≤ X < 120	±0.3	SCALE	1:1
		120 ≤ X < 400	±0.5	UNIT	mm
		400 ≤ X < 1000	±0.8		
		1000 ≤ X	±1.2		
FILLET R.015	FINISH	FRACTIONAL ±1/16		RIONSR	
THIRD ANGLE PROJECTION		ANGULAR ±1°			
		(24, 20)			