



MARK	ECN NO.	Modify	Approve	DATE



Crimp terminals E1508
to the ends of stator wires.


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

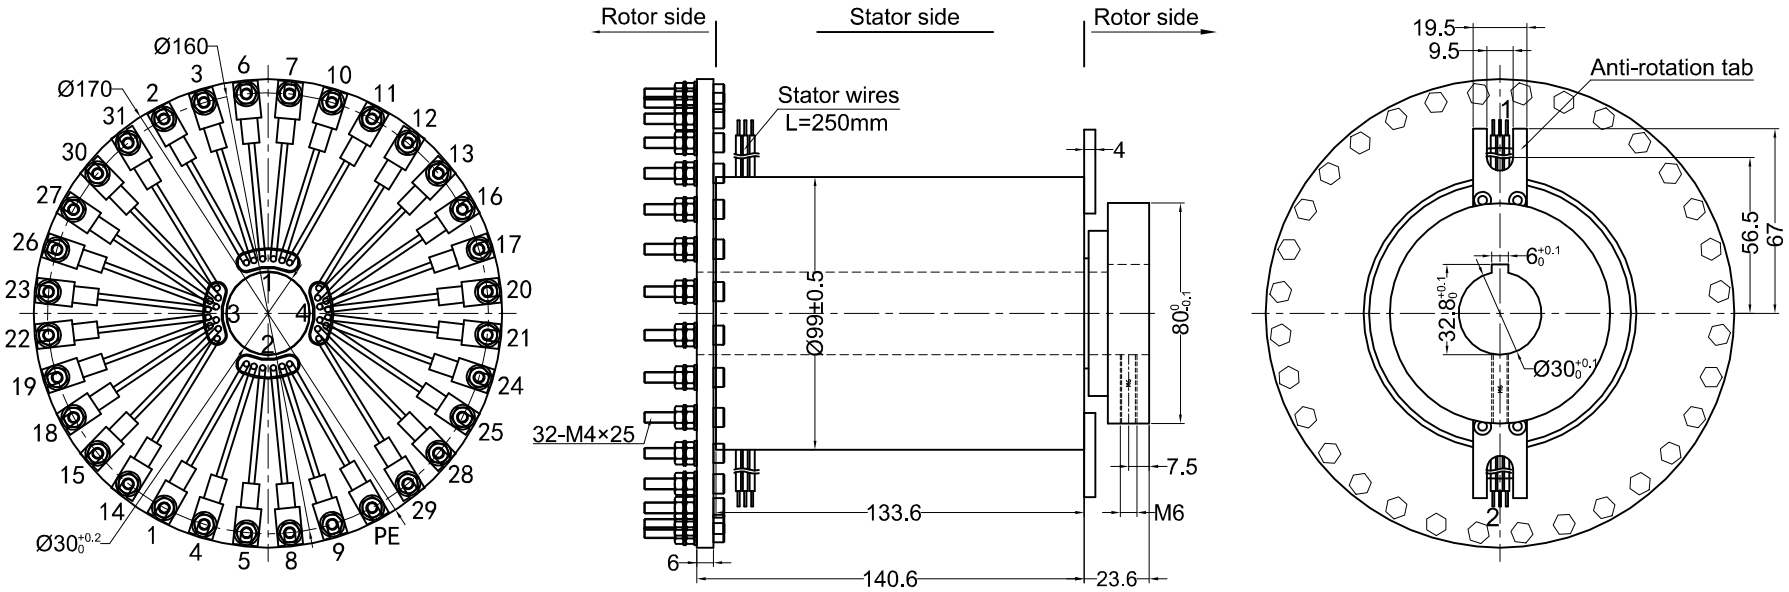


Lead wires match ring number markers

Wire Hole		Ring number
Stator side	Rotor side	
1	1	2,3,6,7,10,11
	3	14,15,18,19,22,23,26,27,30,31
2	2	1,4,5,8,9,PE
	4	12,13,16,17,20,21,24,25,28,29

32 Rings 10A
32-AWG16# Teflon Wires



1	M4x25 Hex head screw
2	M4 Hex nut
3	M4x9x1 Brass washer
4	RV1. 25-4 Terminal
5	M4 Stainless steel spring washer
6	Flange



UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6 ±0.1	
		6 ≤ X < 30 ±0.2	
		30 ≤ X < 120 ±0.3	
		120 ≤ X < 400 ±0.5	
		400 ≤ X < 1000 ±0.8	
		1000 ≤ X ±1.2	
FILLET R.015	FINISH	FRACTIONAL ±1/16	
THIRD ANGLE PROJECTION		ANGULAR ±1°	
		(5,3)	

32 Rings 10A	
MODEL	RX26071506
SIZE	A
RE V.	A / 0
SCALE	1:1
UNIT	mm



Electrical Specifications

1 Rings	32	2 Current	Power module: 32 Rings 10A
3 Voltage	0~380VAC / VDC		
4 Insulation Resistance	≥500MΩ@500VDC		
5 Electrical noise	Max.10mΩ		
6 Dielectric strength	500VAC@50Hz;60s		

Mechanical Specification

7 Speed	0~250 rpm	8 Torque	MAX 2 N·m
---------	-----------	----------	-----------

Environmental adaptability

9 Working temperature	-40℃~+80℃	10 Storage temperature	-45℃~+85℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Al alloy + Engineering plastic
16 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		