






MARK	ECN NO.	Modify	Approve	DATE

Wire cross-section: 0.5~6 mm²
Hole diameter: 4 mm

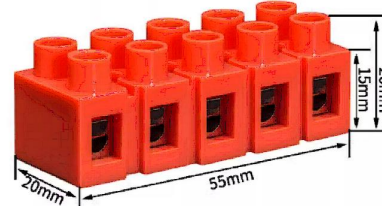

H2519-5P Quick Wiring Terminal Block
(Terminal dimensions for reference only)

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

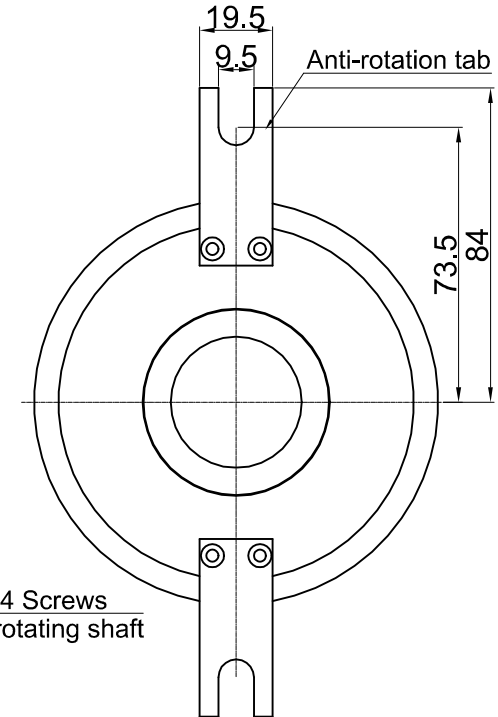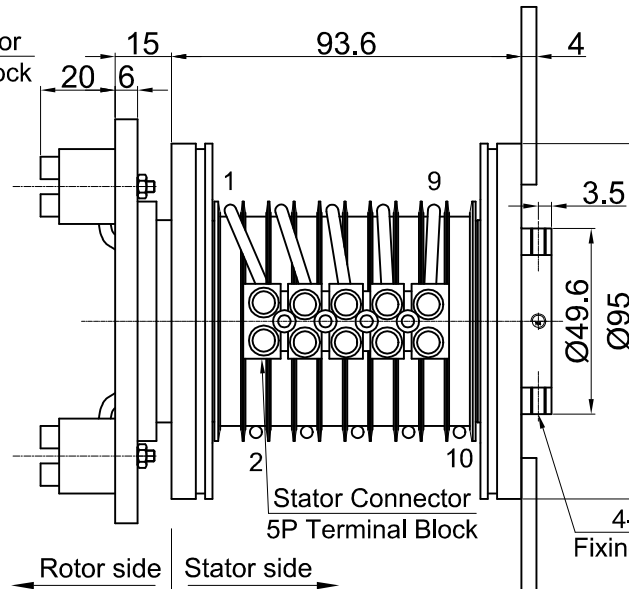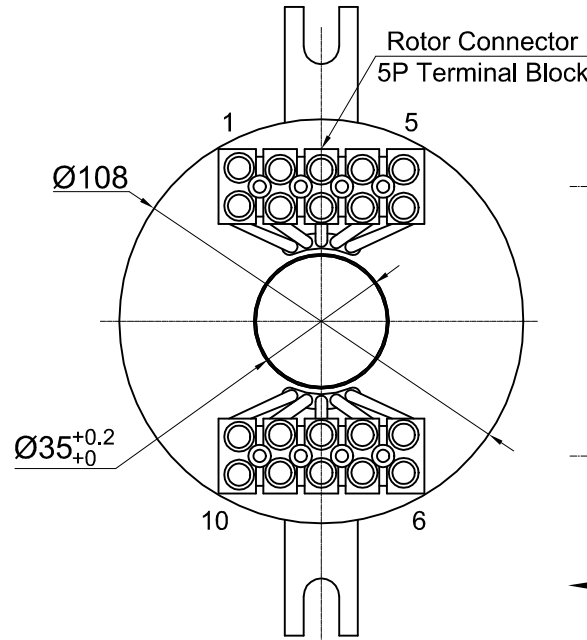

Electrical Specifications

1 Rings	10	2 Current	Power module: 10 Rings 25A
3 Voltage	0~500VAC / VDC		
4 Insulation Resistance	≥800MΩ@800VDC		
5 Electrical noise	Max.10mΩ		
6 Dielectric strength	1000VAC@50Hz:60s		

Mechanical Specification

7 Speed	0~250 rpm	8 Torque	MAX 1 N·m
---------	-----------	----------	-----------

Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-35℃~+85℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g, 11ms, Half sine wave, Vertical 3 times, Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Al alloy + Engineering plastics
16 Lead wire	Rotor:Lead out conductors and connect to wiring terminals. Stator:Lead out conductors and connect to wiring terminals.		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		10 Rings 25A			
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR.		SIZE RANGE TOLERANCE		MODEL		RX26071802	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.							
		X < 6	±0.1	RIONSR		SIZE	A
		6 ≤ X < 30	±0.2				
		30 ≤ X < 120	±0.3				
		120 ≤ X < 400	±0.5				
		400 ≤ X < 1000	±0.8				
		1000 ≤ X	±1.2				
FILLETS R.015	FINISH ✓	FRACTIONAL±1/16		RIONSR		R E V.	A / 0
THIRD ANGLE PROJECTION		ANGULAR±1°					
		(5,5)					
						SCALE	1:1
						UNIT	mm