


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

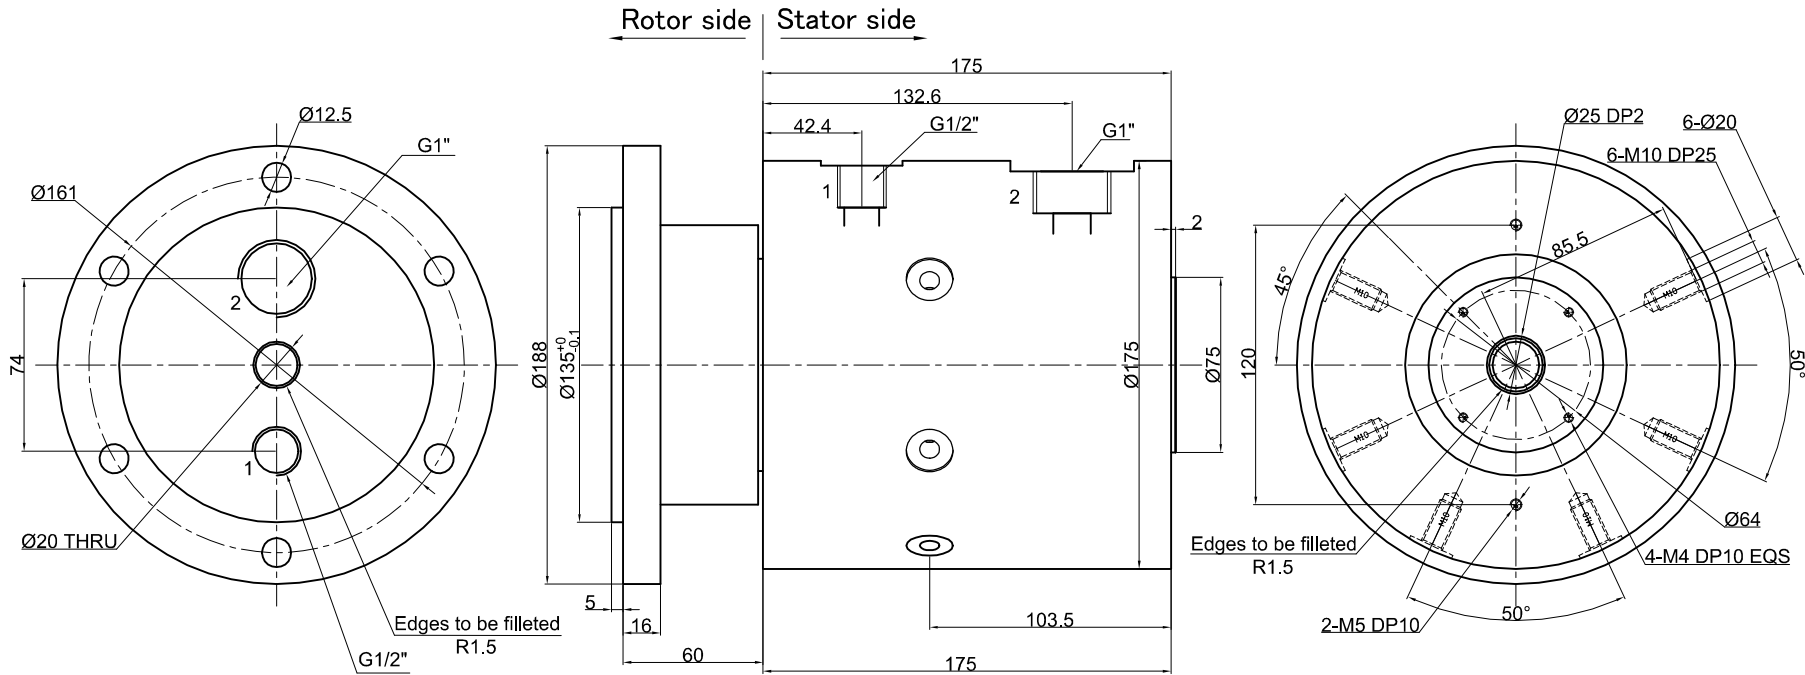

Glyd ring seal

Technical parameters of rotary joint

1	Pressure	≤ 1MPa	2	Passage	2 Passage
3	Torque	Max. 50 N·m	4	Tracheal connector	G1" G1/2"
5	Media type	G1":Compressed Air G1/2":Water	6	Working temperature	-30℃~+80℃
7	Speed	0-50rpm	8	Storage temperature	-35℃~+85℃
9	Texture of material	Housing: Aluminum Alloy (Silver Sandblasted & Anodized);Shaft: Stainless Steel 304			

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		1 Passage Compressed Air + 1 Passage Water	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26071804	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6	±0.1	RION	SIZE A
		6 ≤ X < 30	±0.2		
		30 ≤ X < 120	±0.3		
		120 ≤ X < 400	±0.5		
		400 ≤ X < 1000	±0.8		
		1000 ≤ X	±1.2		
FILLETS R.015	FINISH ✓	FRACTIONAL±1/16 ANGULAR±1° (3,3)		RE V.	A / 0
THIRD ANGLE PROJECTION				SCALE	1:1
				UNIT	mm