MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

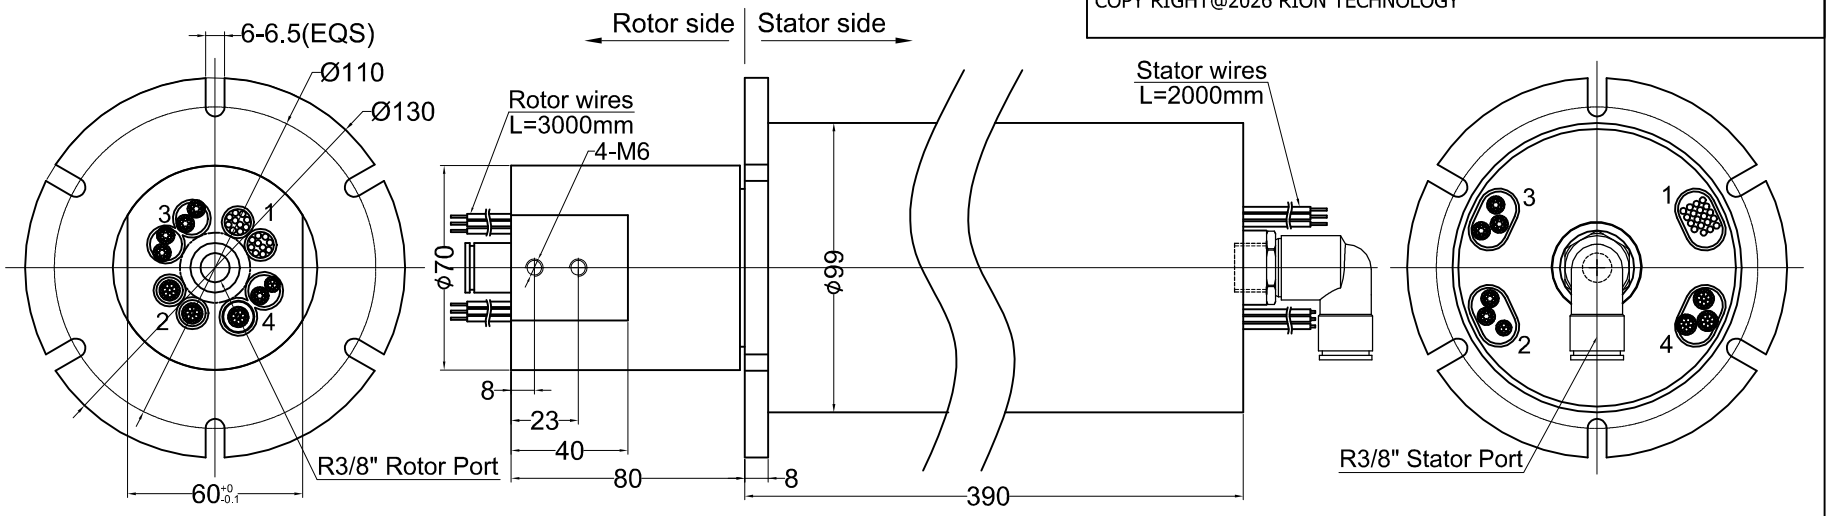

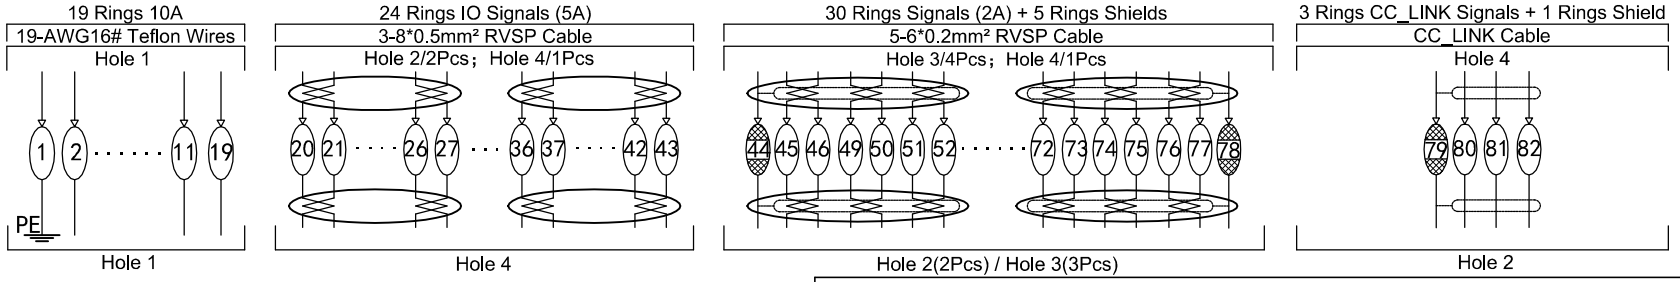

Note: The ground wire shall be connected to the housing, and the shield shall not be connected to the housing.

Technical parameters of rotary joint

1	Pressure	≤ 0.6 MPa	2	Passage	1 Passages
3	Torque	Max. 2 N·m	4	Tracheal connector	R3/8"
5	Media type	Compressed Air	6	Working temperature	-30℃~+80℃
7	Speed	0~200 rpm	8	Storage temperature	-35℃~+85℃
9	Texture of materia	Al alloy			

UNLESS OTHERWISE SPECIFIED

1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR.

2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.

FILLETS R.015 FINISH

THIRD ANGLE PROJECTION

TOLERANCES (EXCEPT AS NOTED)

SIZE RANGE	TOLERANCE
X < 6	±0.1
6 ≤ X < 30	±0.2
30 ≤ X < 120	±0.3
120 ≤ X < 400	±0.5
400 ≤ X < 1000	±0.8
1000 ≤ X	±1.2

FRACTIONAL±1/16
ANGULAR±1°
(15,13)

19 Rings 10A + 24 Rings IO Signals + 30 Rings Signals + 3 Rings CC_LINK Signals + 6 Rings Shields

MODEL RX26071805

RIONSR

SIZE	A
REV.	A / 0
SCALE	1:1
UNIT	mm

Electrical Specifications

1	Rings	82	2	Current	Power module: 19 Rings 10A Signal module: 24 Rings IO Signals + 30 Rings Signals + 3 Rings CC_LINK Signals + 6 Rings Shields
3	Voltage	0~380VAC / VDC			
4	Insulation Resistance	⩾500MΩ@500VDC			
5	Electrical noise	Max.10mΩ			
6	Dielectric strength	500VAC@50Hz;60s			

Mechanical Specification

7	Speed	0~200 rpm	8	Torque	MAX 5 N·m

Environmental adaptability

9	Working temperature	-30℃~+80℃	10	Storage temperature	-35℃~+85℃
11	Humidity	85±3%RH(30℃+5℃)			
12	Shock	40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times			
13	IP rating	IP51			

Material/Attachment

14	Contact Material	Noble metal	15	Housing material	Al alloy
16	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)			