
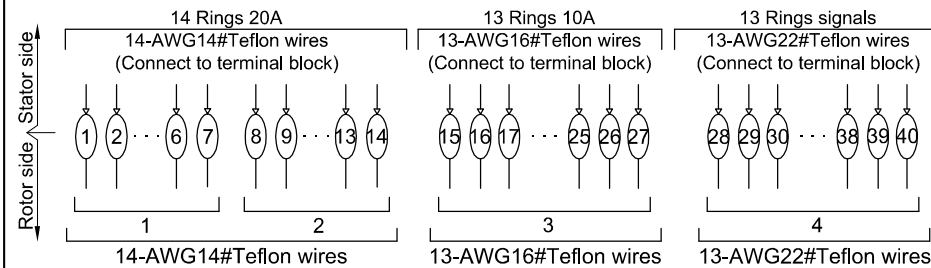


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

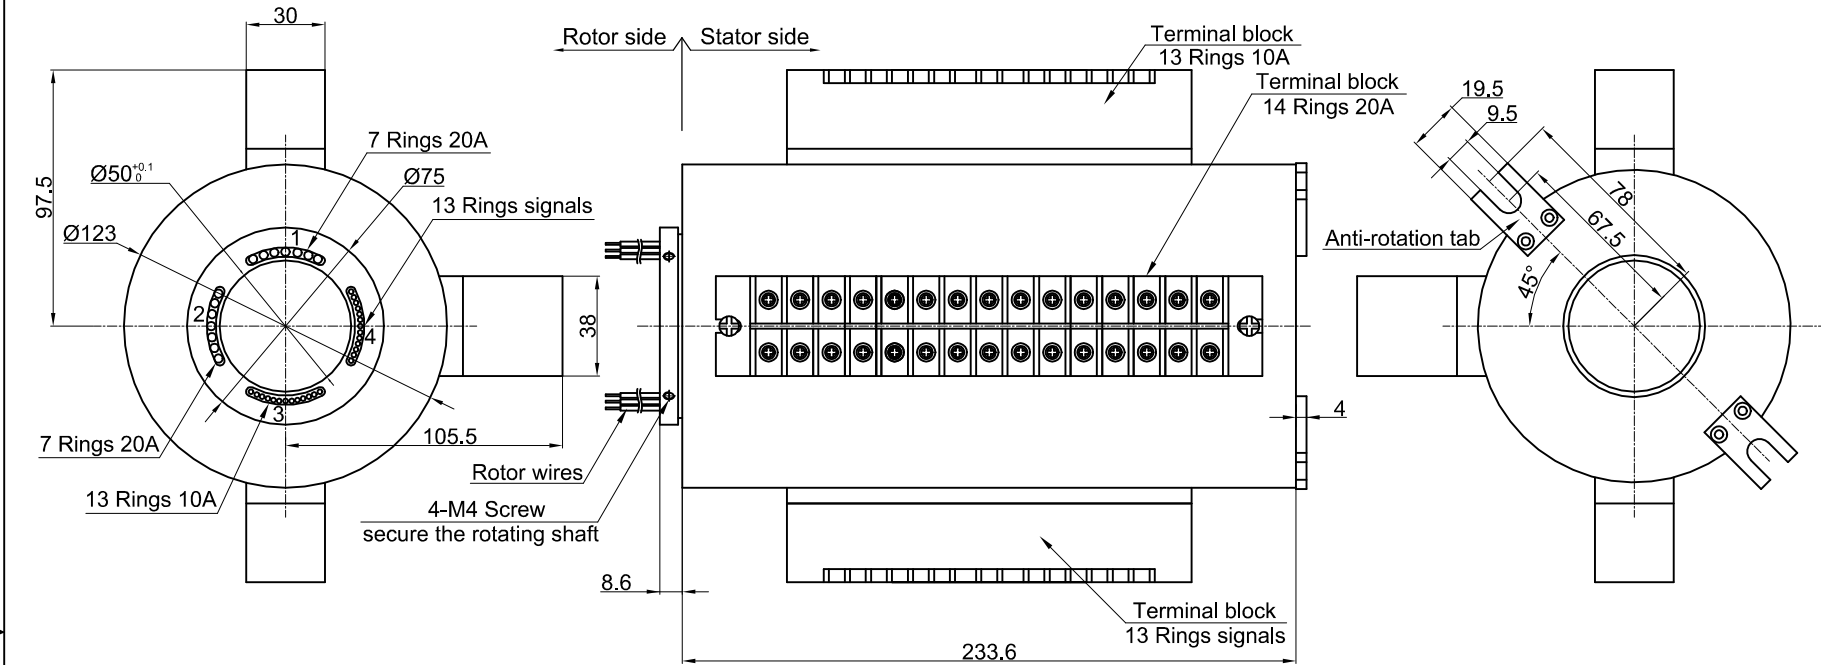

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		14 Rings 20A + 13 Rings 10A + 13 Rings signals	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26080308	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6 ±0.1		SIZE A	
		6 ≤ X < 30 ±0.2		R E V. A / 0	
		30 ≤ X < 120 ±0.3		SCALE 1:1	
		120 ≤ X < 400 ±0.5		UNIT mm	
		400 ≤ X < 1000 ±0.8			
		1000 ≤ X ±1.2			
FILLETS R.015		FINISH		FRACTIONAL ±1/16	
THIRD ANGLE PROJECTION				ANGULAR ±1°	
				(4,3)	

Electrical Specifications

1 Rings	40	2 Current	Power module:
3 Voltage	0~380VAC / VDC		14 Rings 20A + 13 Rings 10A
4 Insulation Resistance	≥500MΩ@500VDC		Signal module:
5 Electrical noise	Max.10mΩ		13 Rings signals
6 Dielectric strength	500VAC@50Hz;60s		

Mechanical Specification

7 Speed	0~150 rpm	8 Torque	MAX 2 N·m
---------	-----------	----------	-----------

Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-35℃~+85℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Al alloy
16 Lead wire	Rotor side: cable length shall be 3m, heat-shrink tube fitted; Stator side: 1×15-position 20A terminal block + 2×15-position 15A terminal blocks		