
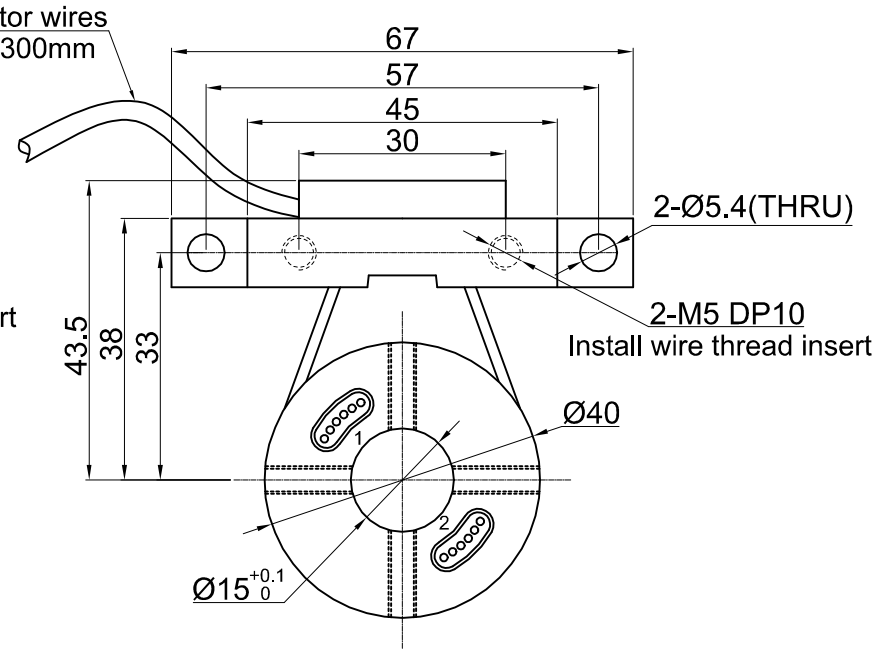
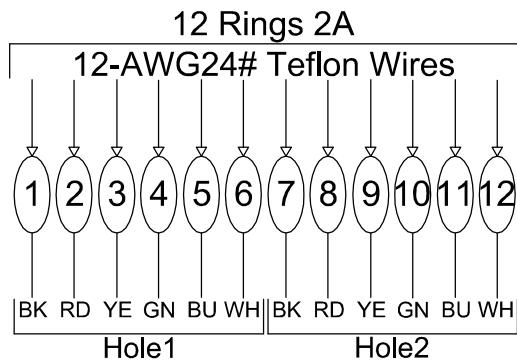


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

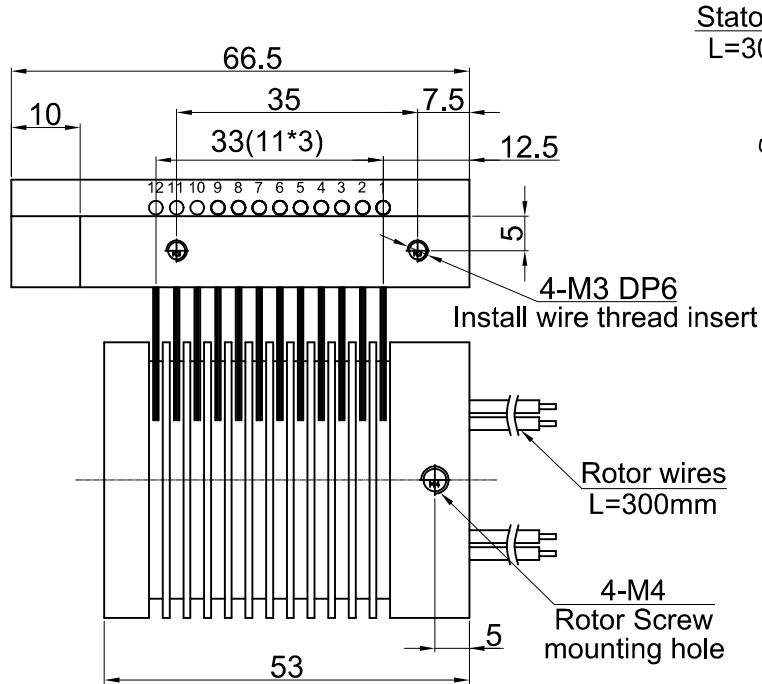

Electrical Specifications

1 Rings	12	2 Current	Signal module:
3 Voltage	0~250VAC / VDC		12 Rings Signals
4 Insulation Resistance	≥500MΩ@500VDC		
5 Electrical noise	Max. 10mΩ		
6 Dielectric strength	500VAC@50Hz;60s		

Mechanical Specification

7 Speed	0~250 rpm	8 Torque	MAX 0.1 N·m
9 Life	40 million revolutions		

Environmental adaptability

10 Working temperature	-30℃~+80℃	11 Storage temperature	-35℃~+85℃
12 Humidity	85±3%RH(30℃+5℃)		
13 Shock	40g, 11ms, Half sine wave, Vertical 3 times, Horizontal 3 times		
14 IP rating	IP44		

Material/Attachment

15 Contact Material	Noble metal	16 Housing material	Al alloy + Engineering plastic
17 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		12 Rings Signals	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26081101	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6 ±0.1		SIZE A	
		6 ≤ X < 30 ±0.2		R.E.V. A / 0	
		30 ≤ X < 120 ±0.3		SCALE 1:1	
		120 ≤ X < 400 ±0.5		UNIT mm	
		400 ≤ X < 1000 ±0.8			
		1000 ≤ X ±1.2			
FILLETS R.015 FINISH ✓		FRACTIONAL ±1/16			
THIRD ANGLE PROJECTION		ANGULAR ±1°			
		(6,4)			