



MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

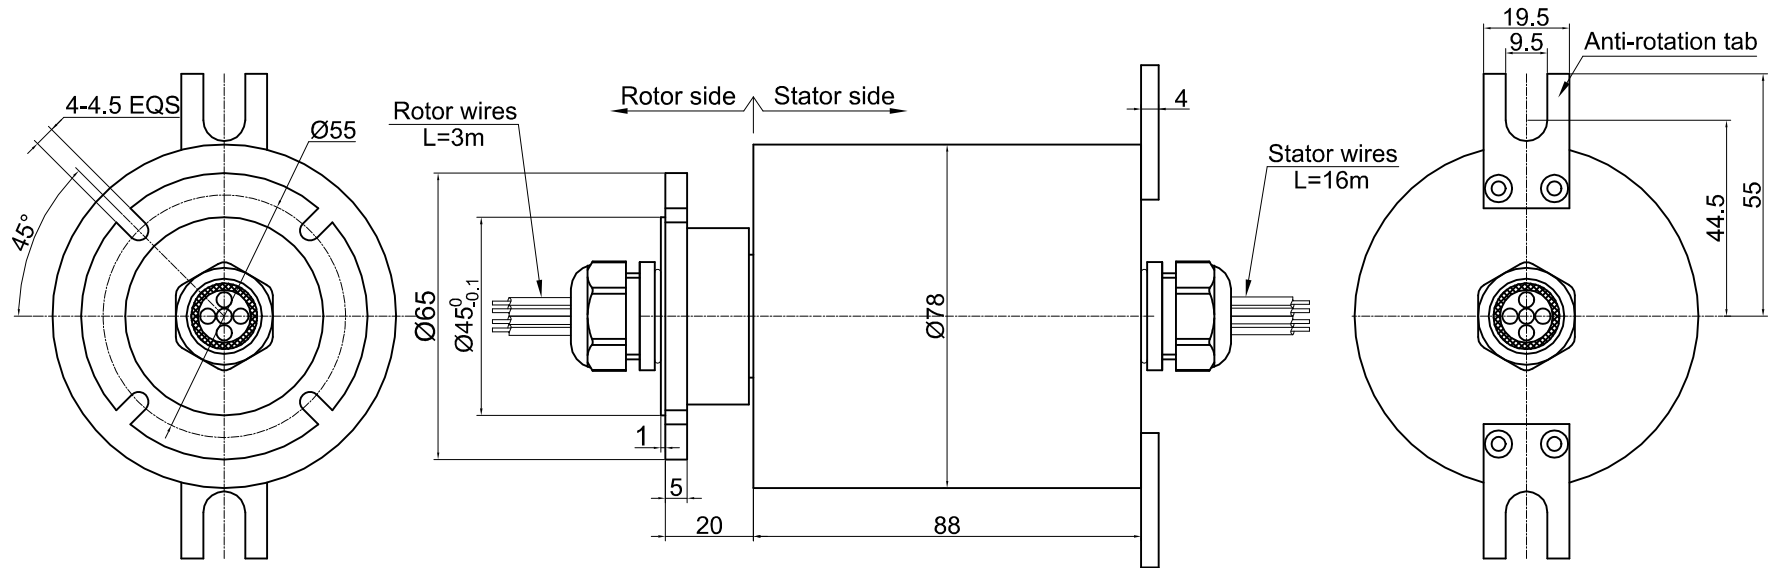

5 Rings 20A
5*2.5mm² Cable



UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		5 Rings 50A	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26081102	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6 ±0.1		SIZE A	
		6 ≤ X < 30 ±0.2		R E V. A / 0	
		30 ≤ X < 120 ±0.3		SCALE 1:1	
		120 ≤ X < 400 ±0.5		UNIT mm	
		400 ≤ X < 1000 ±0.8			
		1000 ≤ X ±1.2			
FILLET R.015	FINISH ✓	FRACTIONAL ±1/16			
THIRD ANGLE PROJECTION		ANGULAR ±1°			
		(7,7)			

Electrical Specifications

1 Rings	5	2 Current	Power module: 5 Rings 50A
3 Voltage	0~380VAC / VDC		
4 Insulation Resistance	≥500MΩ@500VDC		
5 Electrical noise	Max.10mΩ		
6 Dielectric strength	500VAC@50Hz;60s		

Mechanical Specification

7 Speed	0~250 rpm	8 Torque	MAX 5 N·m
---------	-----------	----------	-----------

Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-35℃~+85℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g, 11ms, Half sine wave, Vertical 3 times, Horizontal 3 times		
13 IP rating	IP67		
14 Ex rating	EXDIICT4		

Material/Attachment

15 Contact Material	Noble metal	16 Housing material	304 stainless steel + Al alloy
17 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		