



MARK	ECN NO.	Modify	Approve	DATE


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

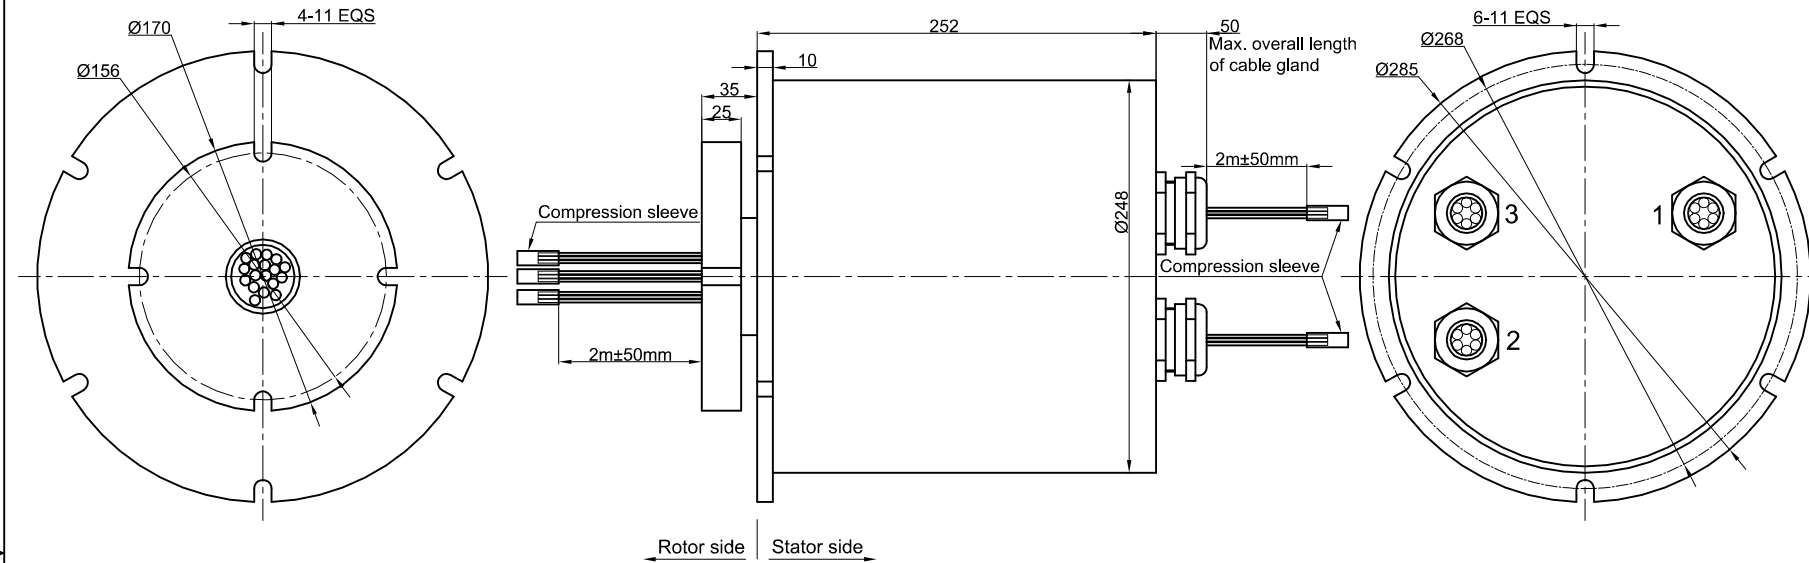

3 Rings 315A
(6 wires in parallel for 315A current rating)
18-AWG6# Teflon wires



Compression Sleeve
Reference Dimensions



UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		3 Rings 315A	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26081109	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6	±0.1	RIONSR	SIZE A
		6 ≤ X < 30	±0.2		
		30 ≤ X < 120	±0.3		
		120 ≤ X < 400	±0.5		
		400 ≤ X < 1000	±0.8		
		1000 ≤ X	±1.2		
FILLET R.015	FINISH	FRACTIONAL ±1/16		RE V.	A / 0
THIRD ANGLE PROJECTION		ANGULAR ±1°		SCALE	1:1
		(10, 10)		UNIT	mm

Electrical Specifications

1 Rings	3	2 Current	Power module: 3 Rings 315A
3 Voltage	0~380VAC / VDC		
4 Insulation Resistance	≥500MΩ@500VDC		
5 Electrical noise	Max.70mΩ		
6 Dielectric strength	500VAC@50Hz;60s		

Mechanical Specification

7 Speed	0~3 rpm	8 Torque	MAX 4 N·m
---------	---------	----------	-----------

Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-35℃~+85℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g, 11ms, Half sine wave, Vertical 3 times, Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Al alloy
16 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		