


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

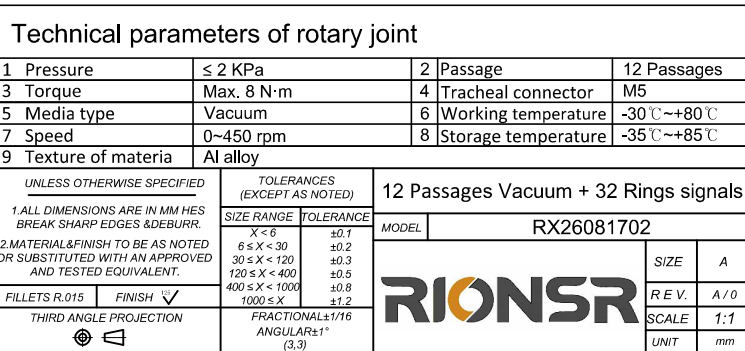

1	Rings	32	2	Current	Signal module: 32 Rings signals
3	Voltage	0~50VAC / VDC			
4	Insulation Resistance	≥ 100MΩ@100VDC			
5	Electrical noise	Max. 10mΩ			
6	Dielectric strength	100VAC@50Hz; 60s			

7	Speed	0~450 rpm	8	Torque	MAX 8 N·m
---	-------	-----------	---	--------	-----------

Environmental adaptability	
----------------------------	--

9	Working temperature	-30℃~+80℃	10	Storage temperature	-35℃~+85℃
---	---------------------	-----------	----	---------------------	-----------

11	Humidity	85±3%RH(30℃+5℃)		
12	Shock	40~140m/s Half sine wave		

12	Shock	40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times
----	-------	---

13	IP rating	IP51			
----	-----------	------	--	--	--

[illegible]

14	Contact Material	Noble metal	15	Housing material	Al alloy
----	------------------	-------------	----	------------------	----------

16	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)
----	-----------	---

		Stator. (See wiring diagram)
--	--	------------------------------