



MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

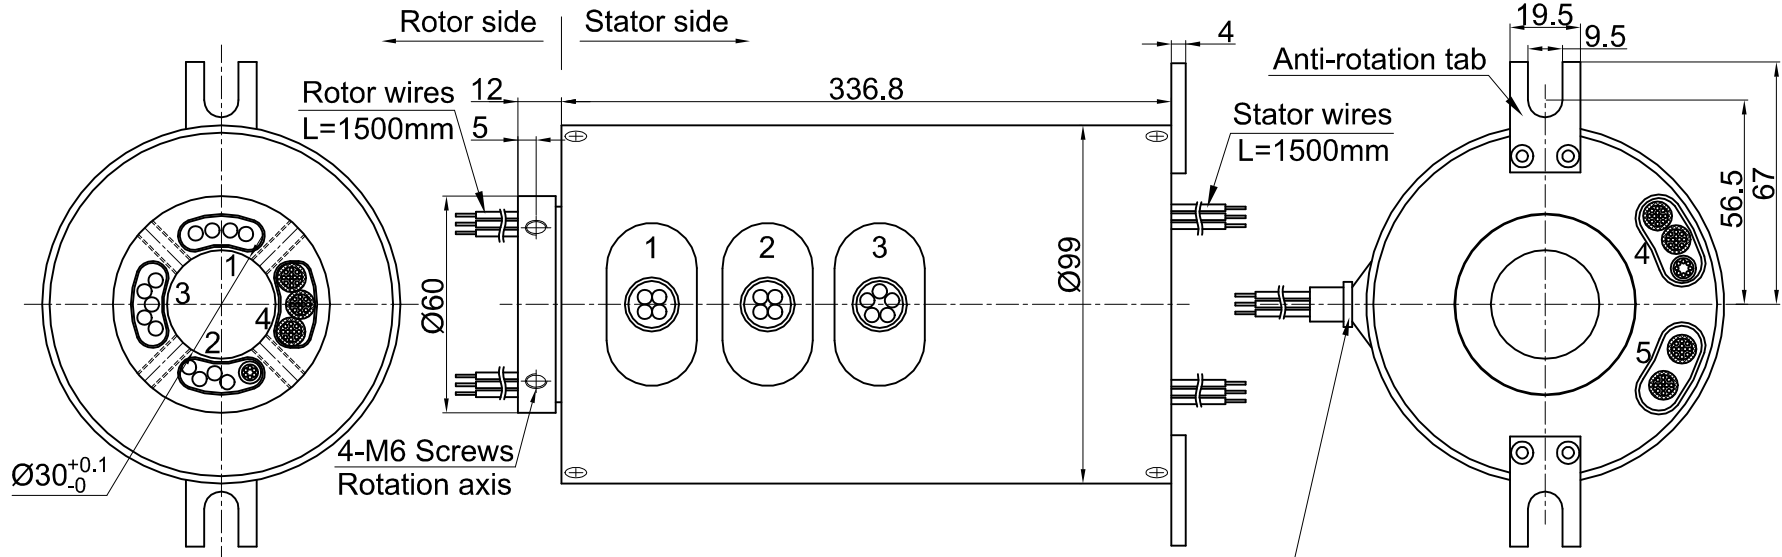

Bind the cable sleeve in place using cable ties.

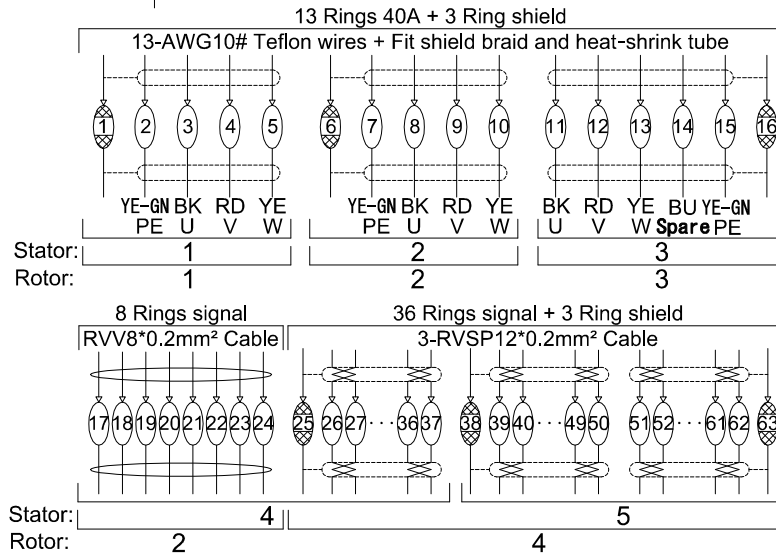

Electrical Specifications

1 Rings	63	2 Current	Power module:
3 Voltage	0~380VAC / VDC		13 Rings 40A + 3 Rings shield
4 Insulation Resistance	≥500MΩ@500VDC		Power module:
5 Electrical noise	Max.10mΩ		44 Rings signal + 3 Rings shield
6 Dielectric strength	500VAC@50Hz;60s		

Mechanical Specification

7 Speed	0~300 rpm	8 Torque	MAX 3 N·m
---------	-----------	----------	-----------

Environmental adaptability

9 Working temperature	-30℃~+80℃	10 Storage temperature	-35℃~+85℃
11 Humidity	85±3%RH(30℃+5℃)		
12 Shock	40g, 11ms, Half sine wave, Vertical 3 times, Horizontal 3 times		
13 IP rating	IP51		

Material/Attachment

14 Contact Material	Noble metal	15 Housing material	Al alloy
16 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		13 Rings 40A + 3 Rings shield 44 Rings signal + 3 Rings shield	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26082401	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6 ±0.1		SIZE A	
		6 ≤ X < 30 ±0.2		R E V. A / 0	
		30 ≤ X < 120 ±0.3		SCALE 1:1	
		120 ≤ X < 400 ±0.5		UNIT mm	
		400 ≤ X < 1000 ±0.8			
		1000 ≤ X ±1.2			
FILLETS R.015 FINISH ✓		FRACTIONAL ±1/16			
THIRD ANGLE PROJECTION		ANGULAR ±1°			
		(7,6)			