


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

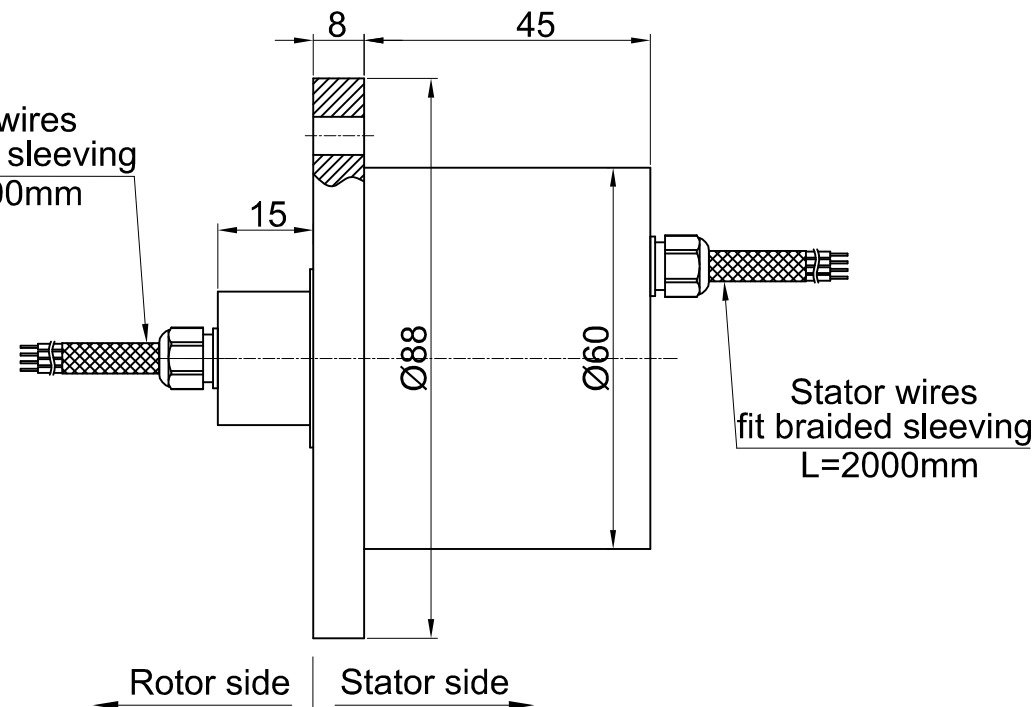

A horizontal number line with arrows at both ends. There are six vertical tick marks. Below the first four tick marks are ovals containing the numbers 1, 2, 3, and 4. Below the last two tick marks are ovals containing the numbers 5 and 6.

Electrical Specifications

1	Rings	6	2	Current	Power module: 4 Rings 10A + 2 Rings 2A
3	Voltage	0~400VAC / VDC			
4	Insulation Resistance	≥500MΩ@500VDC			
5	Electrical noise	Max. 10mΩ			
6	Dielectric strength	500VAC@50Hz;60s			

Mechanical Specification

7	Speed	0~250 rpm	8	Torque	MAX 0.3 N·m
---	-------	-----------	---	--------	-------------

Environmental adaptability

9	Working temperature	-30℃~+200℃	10	Storage temperature	-35℃~+205℃
11	Humidity	85±3%RH(30℃+5℃)			
12	Shock	40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times			
13	IP rating	IP51			

Material/Attachment

14	Contact Material	Noble metal	15	Housing material	Al alloy
16	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)			