


MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

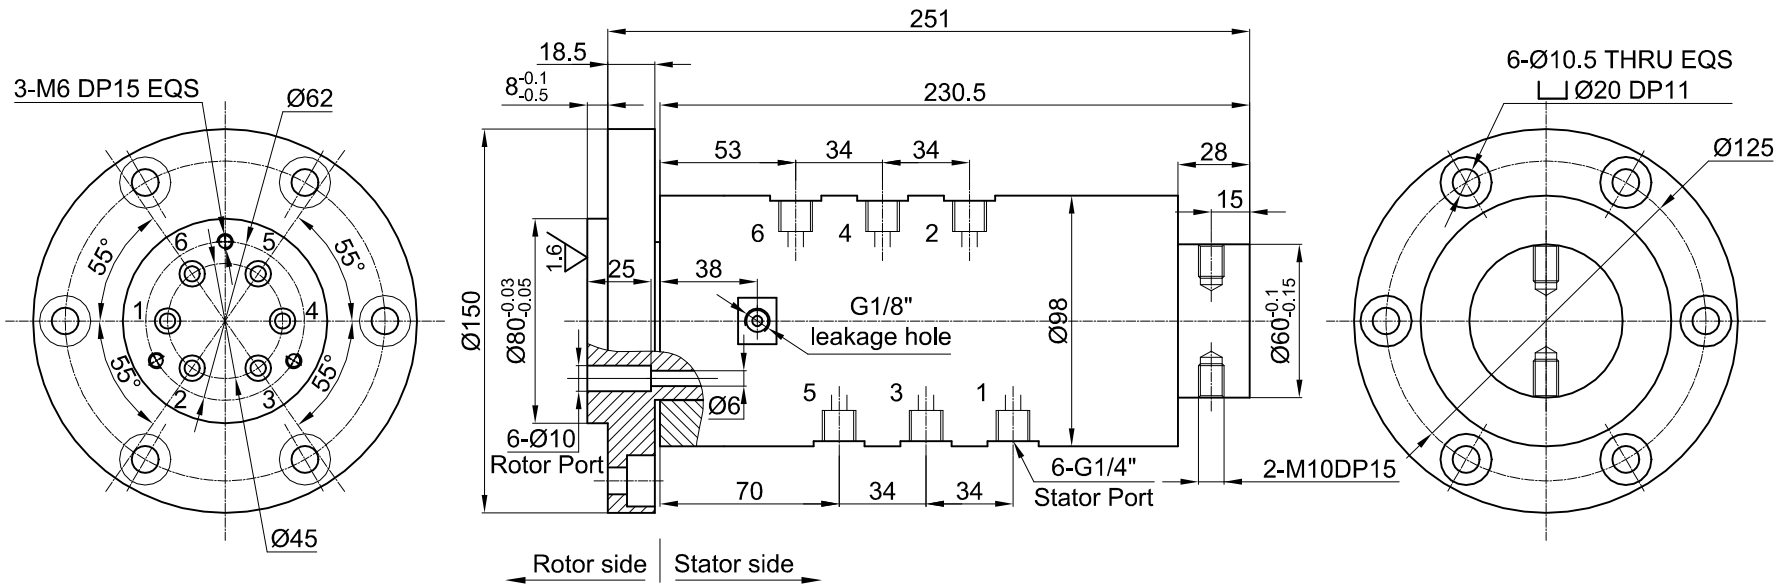

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		2 Passages hydraulic oil + 4 Passages compressed air	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26090703	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6	±0.1	SIZE	A
		6 ≤ X < 30	±0.2	R E V.	A / 0
		30 ≤ X < 120	±0.3	SCALE	1:1
		120 ≤ X < 400	±0.5	UNIT	mm
		400 ≤ X < 1000	±0.8		
		1000 ≤ X	±1.2		
FILLET R.015	FINISH ✓	FRACTIONAL±1/16 ANGULAR±1° (6,6)		RIONSR	
THIRD ANGLE PROJECTION					

Technical parameters of rotary joint

1 Pressure	Oil pressure:≤ 5 MPa Air pressure:≤ 0.6 MPa	2 Passage	6 Passages
3 Torque	Max. 5 N·m	4 Tracheal connector	Rotor:Ø10 Stator:G1/4"
5 Media type	Hydraulic oil × 2 Compressed air × 4	6 Working temperature	-30℃~+80℃
7 Speed	0~200 rpm	8 Storage temperature	-35℃~+85℃
9 Texture of materia	special steel + Al alloy	10 Lifetime(approx.)	20 million revolutions