


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

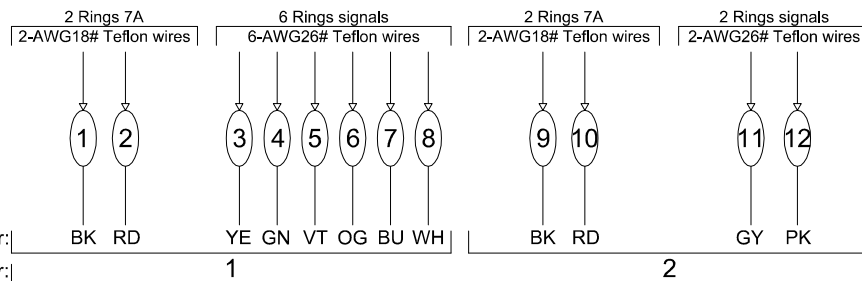

14	Contact Material	Noble metal	15	Housing material	Al alloy
16	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)			

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		4 Rings 7A + 8 Rings signals			
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE TOLERANCE		MODEL RX26090707			
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		$X < 6$ ± 0.1 $6 \leq X < 30$ ± 0.2 $30 \leq X < 120$ ± 0.3 $120 \leq X < 400$ ± 0.5 $400 \leq X < 1000$ ± 0.8 $1000 \leq X$ ± 1.2					
FILLETS R.015	FINISH 	THIRD ANGLE PROJECTION 		FRACTIONAL $\pm 1/16$ ANGULAR $\pm 1^\circ$ (.6)		SIZE	A
				R E V.		A / 0	
				SCALE		1:1	
				UNIT		mm	