
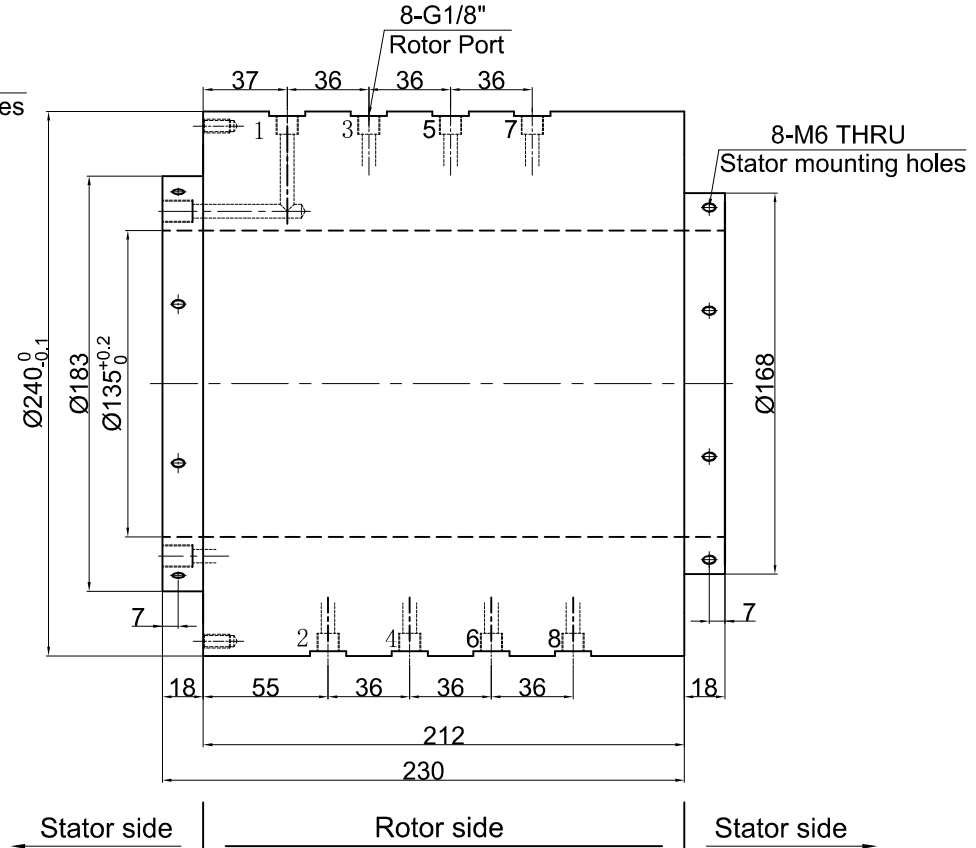


| MARK | ECN NO. | Modify | Approve | DATE |
|------|---------|--------|---------|------|
|      |         |        |         |      |
|      |         |        |         |      |
|      |         |        |         |      |

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2026 RION TECHNOLOGY

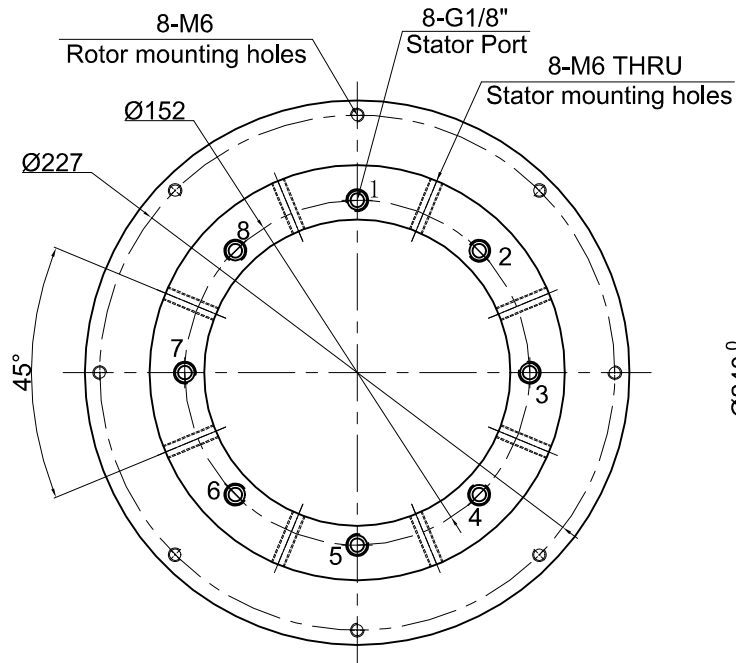

|                                                                                            |          |                                    |      |                           |       |
|--------------------------------------------------------------------------------------------|----------|------------------------------------|------|---------------------------|-------|
| UNLESS OTHERWISE SPECIFIED                                                                 |          | TOLERANCES (EXCEPT AS NOTED)       |      | 8 Passages Compressed air |       |
| 1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.                                |          | SIZE RANGE TOLERANCE               |      | MODEL RX26100604          |       |
| 2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT. |          | X < 6                              | ±0.1 | SIZE                      | A     |
|                                                                                            |          | 6 ≤ X < 30                         | ±0.2 | R E V.                    | A / 0 |
|                                                                                            |          | 30 ≤ X < 120                       | ±0.3 | SCALE                     | 1:1   |
|                                                                                            |          | 120 ≤ X < 400                      | ±0.5 | UNIT                      | mm    |
|                                                                                            |          | 400 ≤ X < 1000                     | ±0.8 |                           |       |
|                                                                                            |          | 1000 ≤ X                           | ±1.2 |                           |       |
| FILLET R.015                                                                               | FINISH ✓ | FRACTIONAL ±1/16 ANGULAR ±1° (4,4) |      |                           |       |
| THIRD ANGLE PROJECTION                                                                     |          | RIONSR                             |      |                           |       |

| Technical parameters of rotary joint |                |                       |            |
|--------------------------------------|----------------|-----------------------|------------|
| 1 Pressure                           | ≤ 1 MPa        | 2 Passage             | 8 Passages |
| 3 Torque                             | Max. 20 N·m    | 4 Tracheal connector  | G1/8"      |
| 5 Media type                         | Compressed air | 6 Working temperature | -30℃~+80℃  |
| 7 Speed                              | 0~100 rpm      | 8 Storage temperature | -35℃~+85℃  |
| 9 Texture of materia                 | Al alloy       |                       |            |