
MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

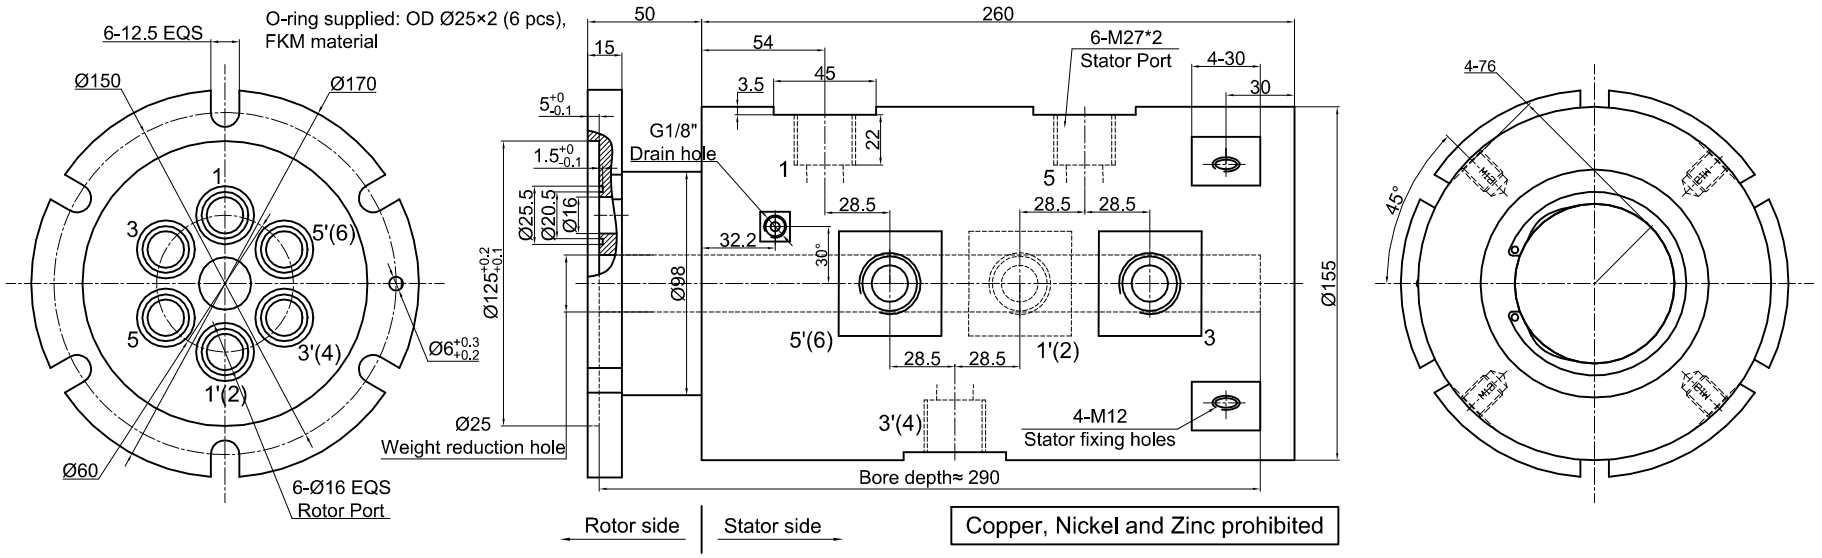

UNLESS OTHERWISE SPECIFIED	TOLERANCES (EXCEPT AS NOTED)	6-passage rotary union	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR.	SIZE RANGE / TOLERANCE	MODEL	RX26101903
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.	X < 6: ±0.1; 6 ≤ X < 30: ±0.2; 30 ≤ X < 120: ±0.3; 120 ≤ X < 400: ±0.5; 400 ≤ X < 1000: ±0.8; 1000 ≤ X: ±1.2	RIONSR	SIZE: A; REV.: A/0; SCALE: 1:1; UNIT: mm
FILLETS R.015 FINISH	FRACTIONAL±1/16 ANGULAR±1° (3,3)		
THIRD ANGLE PROJECTION			

Technical parameters of rotary joint

1	Pressure	≤ 3 MPa	2	Passage	6 Passages
3	Torque	Max. 35 N·m	4	Tracheal connector	Rotor Port: G1/8" Stator Port: M27*2
5	Media type	Water Ethylene Glycol Antifreeze	6	Working temperature	-10℃~+100℃
7	Speed	0~60 rpm	8	Storage temperature	-15℃~+105℃
9	Texture of materia	304 stainless steel			