
MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

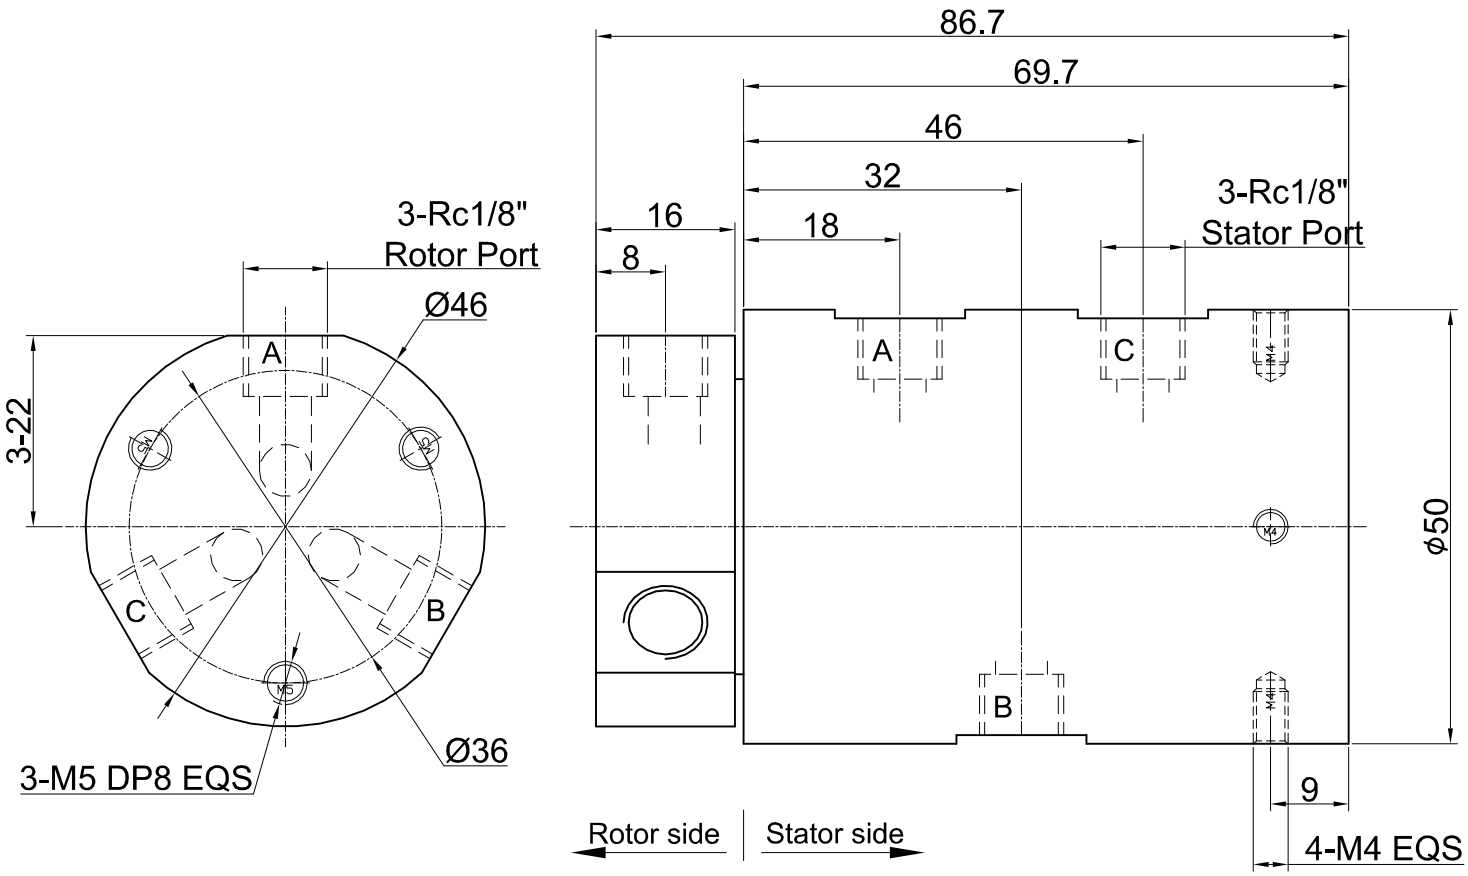

UNLESS OTHERWISE SPECIFIED

1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR.

2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.

FILLETS R.015 | FINISH

THIRD ANGLE PROJECTION

TOLERANCES (EXCEPT AS NOTED)

SIZE RANGE	TOLERANCE
X < 6	±0.1
6 ≤ X < 30	±0.2
30 ≤ X < 120	±0.3
120 ≤ X < 400	±0.5
400 ≤ X < 1000	±0.8
1000 ≤ X	±1.2

FRACTIONAL±1/16
ANGULAR±1°
(2,2)

3 Passages Negative pressure

MODEL: RX26102209

RIONSR

SIZE	A
REV.	A / 0
SCALE	1:1
UNIT	mm

Technical parameters of rotary joint

1	Pressure	≤ 0.6 MPa	2	Passage	3 Passages
3	Torque	Max. 1 N·m	4	Tracheal connector	Rc1/8"
5	Media type	Negative pressure	6	Working temperature	-30℃~+80℃
7	Speed	0~250 rpm	8	Storage temperature	-35℃~+85℃
9	Texture of materia	Al alloy			