


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

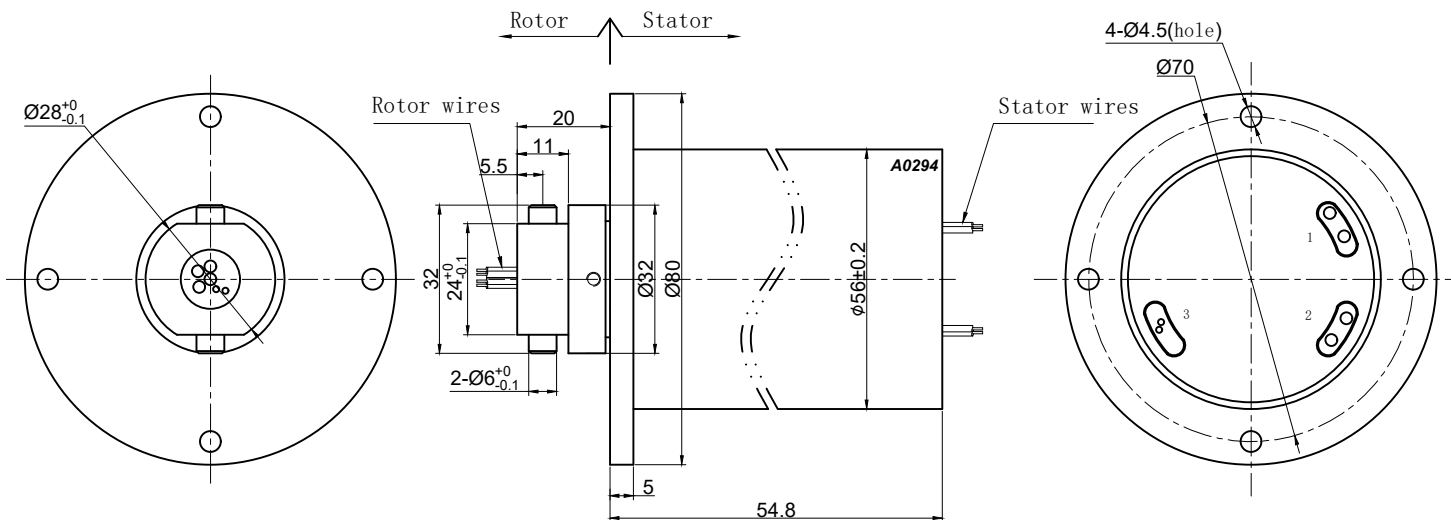

Electrical Specification

1	Rings	6	2	Current	Power module:4 rings ,20A/ring Signal module: 2 rings 5A
2	Voltage	0-240VAC/VDC			
3	Insulation Resistance	500M Ω @500VDC			
4	Electrical noise	Max.10m Ω ;			
5	Dielectric strength	500VAC@50Hz;60S			

Mechanical Specification


6	Speed	0~250RPM;	7	Torque	Max.0.5 N.M;
---	-------	-----------	---	--------	--------------

Environmental adaptability

9	Working temperature	-30 $^{\circ}$ C~+80 $^{\circ}$ C	10	Storage temperature	-30 ~+80
11	humidity	85 \pm 3%(30 $^{\circ}$ C+5 $^{\circ}$ C)			
12	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
13	IP Class	IP51			

Material/Attachment

14	Contact Material	noble matal	15	Housing material	ALL Alloy+Engineering plastics
16	Lead wire	Rotor: 2500mm (See wiring diagram) Stator: 500mm (See wiring diagram)			

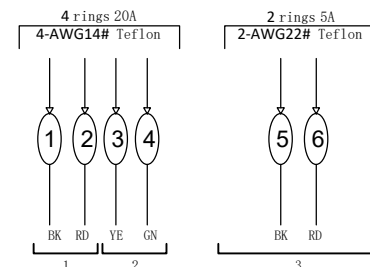

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		4 rings 20A+2 rings 5A					
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X \pm .1		MODEL	RZ056-P0420-P0205				
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX \pm .03		RION	SIZE	A			
FILLETS R.015		FINISH \checkmark			XXX \pm .005	R E V.	A / 0		
THIRD ANGLE PROJECTION		FRACTIONAL \pm 1/16		DWG.NO	FSD	DATE	2022-11-09	UNIT	mm
		ANGULAR \pm 1 $^{\circ}$							