


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.

COPY RIGHT@2020 RION TECHNOLOGY

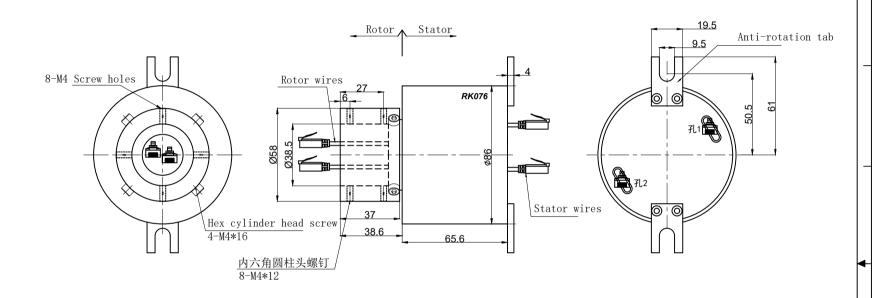





100MEthernet signal(8 rings)+shield(2 rings)(Line length L=2000mm)
CAT.7 Round cable RJ45 male head with both ends(2 root)

For note:						UNLESS OTHERWISE SPECIFIED  1.ALL DIMENSIONS ARE IN MM HES BREAK		TOLERANCES (EXCEPT AS NOTED)	Slip ring shape figure				
Ring the number:	10	Dynamic resistance:	Max. 10mΩ	Contact materials:	Precious metals	SHARP EDGES &DEBURR		,	MODEL		RZ086-2E		
Working voltage:	0.000040.000	Work speed:	0-250 RPM	Torsional force :	0. 3N. m	SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL X±.1 XX±.03				SIZE	Α
	0 00011107 100	· ·		Torstonal force :	U. 3N. M	FILLETS R.015	FINISH 125	XXX±.005		4 【		R E V.	A/0
Dielectric strength:	000111111111111111111111111111111111111	Protection grade: Working temperature:	-30° C + 80° C			THIRD ANGLE PROJECTION		FRACTIONAL±1/16				SCALE	1:1
Compressive strength:	500VAC@60S	Storage temperature:			Aluminum alloy+ Engineering plastics	♦ 🖯		ANGULAR±1°	DWG.NO	FSD	DATE 2022-11-09	UNIT	mm