


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2023 RION TECHNOLOGY

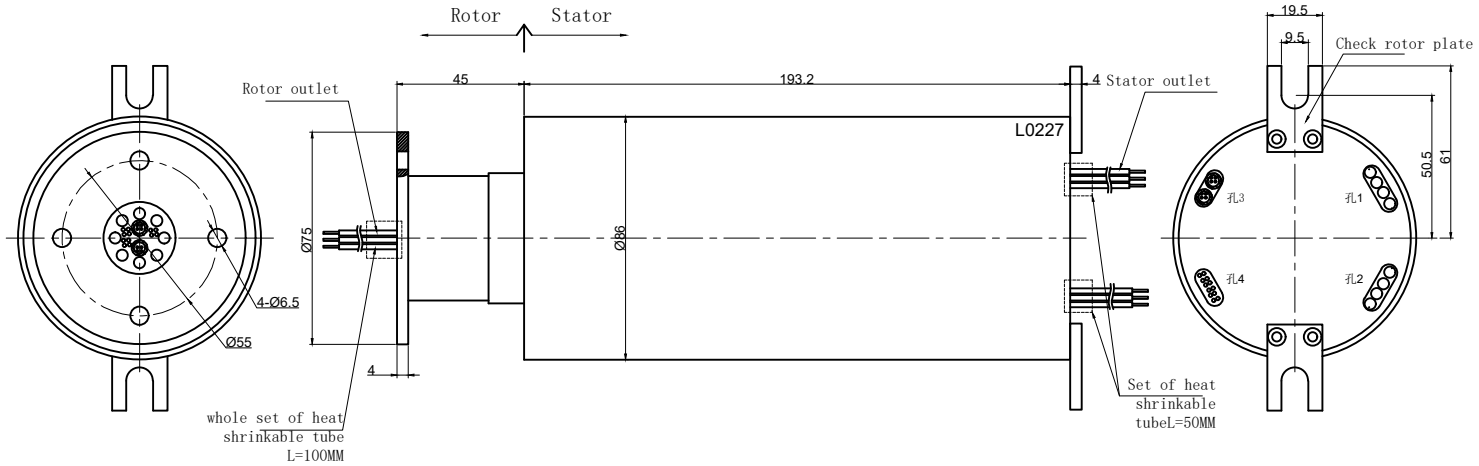

Electrical Specification

1	Rings	30	2	Current	Power module:8 rings ,40A/ring Signal module: 22 rings signal
2	Voltage	0-380VAC/VDC			
3	Insulation Resistance	500M Ω @500VDC			
4	Electrical noise	Max.10m Ω ;			
5	Dielectric strength	500VAC@50Hz;60S			

Mechanical Specification


6	Speed	0~250RPM;	7	Torque	Max.0.5 N.M;
---	-------	-----------	---	--------	--------------

Environmental adaptability

9	Working temperature	-30 $^{\circ}$ C~+80 $^{\circ}$ C	10	Storage temperature	-30 ~+80
11	humidity	85 \pm 3%(30 $^{\circ}$ C+5 $^{\circ}$ C)			
12	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
13	IP Class	IP51			

Material/Attachment

14	Contact Material	noble metal	15	Housing material	ALL Alloy+Engineering plastics
16	Lead wire	Rotor: 2000mm (See wiring diagram) Stator: 2000mm(See wiring diagram)			

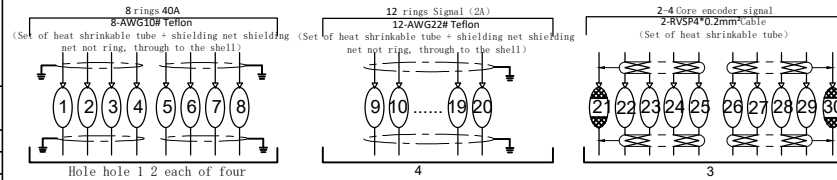

UNLESS OTHERWISE SPECIFIED		TOLERANCES EXCEPT AS NOTED)		8 rings 10A+22 rings Signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		DECIMAL X \pm .1 XX \pm .03 XXX \pm .005		MODEL RZ086-P0840-S22	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		FILLETS R.015 FINISH \checkmark		RION	
THIRD ANGLE PROJECTION		FRACTIONAL \pm 1/16 ANGULAR \pm 1 $^{\circ}$		SIZE	A
		DWG.NO FSD DATE 2022-11-09		RE V.	A / 0
				SCALE	1:1
				UNIT	mm