


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

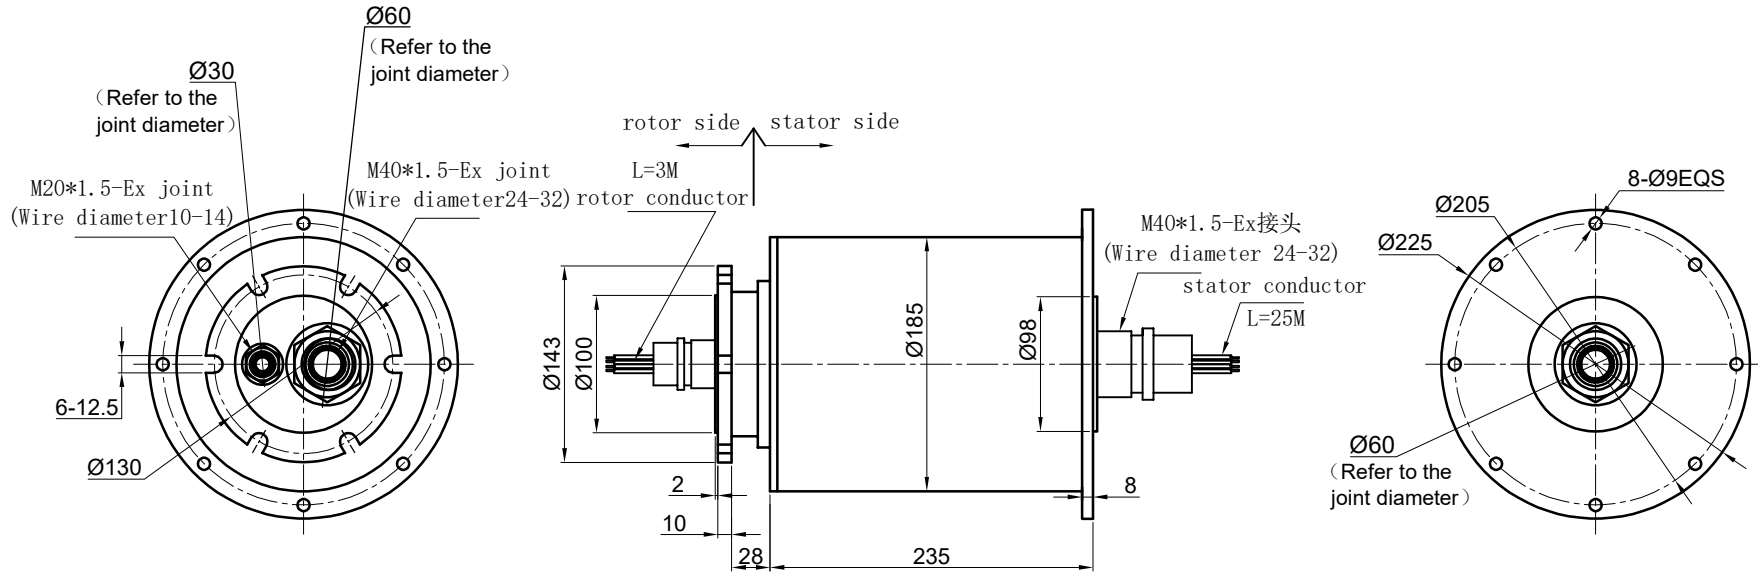

### Electrical Specification

1	Rings	8	2	Current	Power module:4 ring 50A Signal module: 4 ring 15A
2	Voltage	0-380VAC/VDC			
3	Insulation Resistance	500M $\Omega$ @500VDC			
4	Electrical noise	Max.10mQ;#6VDC, 50mA			
5	Dielectric strength	500VAC@50Hz;60S			

### Mechanical Specification


6	Speed	0~2RPM;	7	Torque	Max.0.5 N.M;
---	-------	---------	---	--------	--------------

### Environmental adaptability

9	Working temperature	-30 $^{\circ}$ C~+80 $^{\circ}$ C	10	Storage temperature	-30 $^{\circ}$ C~+80 $^{\circ}$ C
11	humidity	85 $\pm$ 3%(30 $^{\circ}$ C+5 $^{\circ}$ C)			
12	Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times			
13	IP Class	IP65		Explosion-proof grade	EXDIIAT5

### Material/Attachment

14	Contact Material	noble metal	15	Housing material	Aluminum alloy hard anodic oxidation
16	Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)			

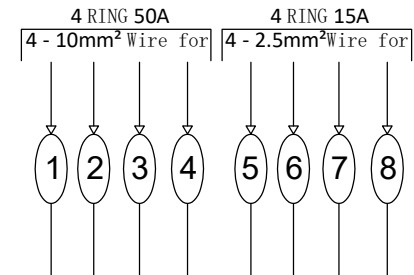

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		4 ring 50A+4 ring 15A			
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		DECIMAL X $\pm$ 1		MODEL	<b>RZ185-P0450-0415-EX</b>		
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX $\pm$ .03		<b>RION</b>	SIZE	A	
FILLETS R.015		XXX $\pm$ .005			R E V.	A / 0	
THIRD ANGLE PROJECTION		FRACTIONAL $\pm$ 1/16		SCALE	1:1		
ANGULAR $\pm$ 1 $^{\circ}$		DWG.NO	FSD	DATE	2022-11-09	UNIT	mm