
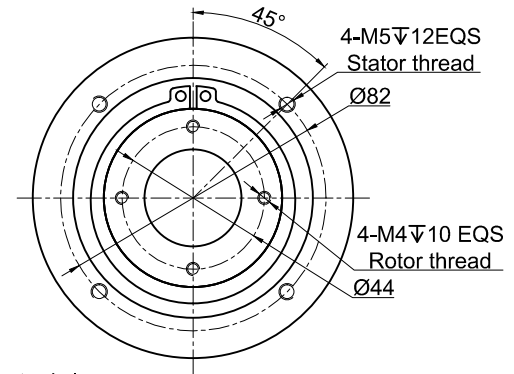
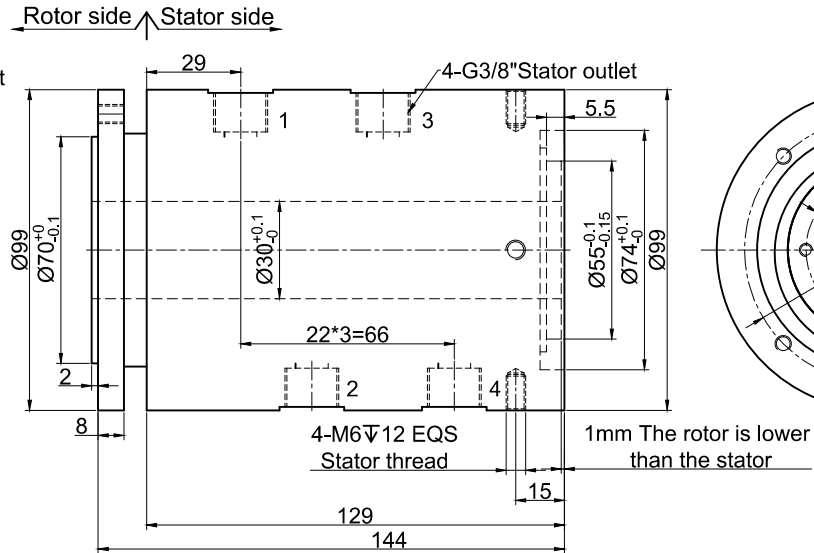



THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

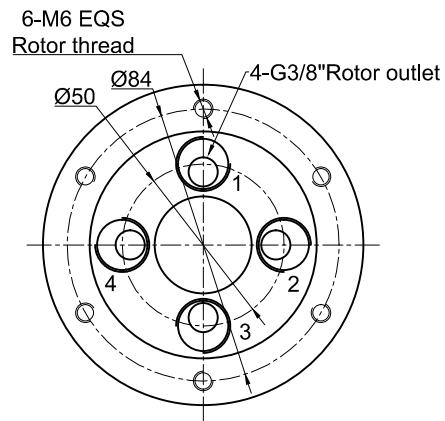

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		4 passage Gas	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		DECIMAL XX±.03 XXX±.005		MODEL	RJ4030-04
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		FRACTIONAL ±1/16 ANGULAR ±1°		SIZE	A
FILLET R.015	FINISH			RE V.	A / 0
THIRD ANGLE PROJECTION				SCALE	1:1
				UNIT	mm

Technical parameters of rotary joint

1 Pressure	Max 1 Mpa	2 Passage	4 passage Gas
3 Torque	Max.2.5 N.M;	4 Tracheal connector	G3/8"
5 Media type	Compressed air	6 Working temperature	-30℃~+80℃
7 Speed	0-250RPM	8 Storage temperature	-35℃~+85℃
9 Texture of materia	ALL Alloy		