
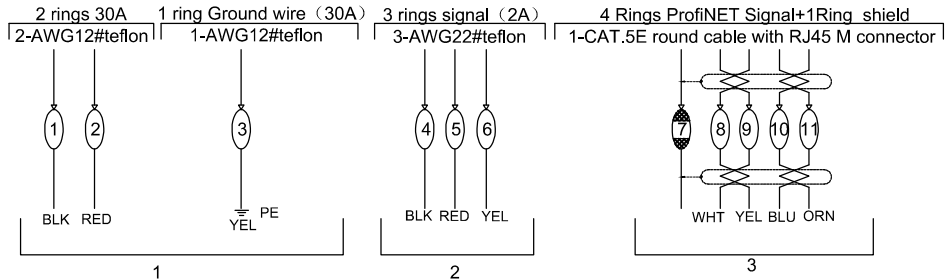


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

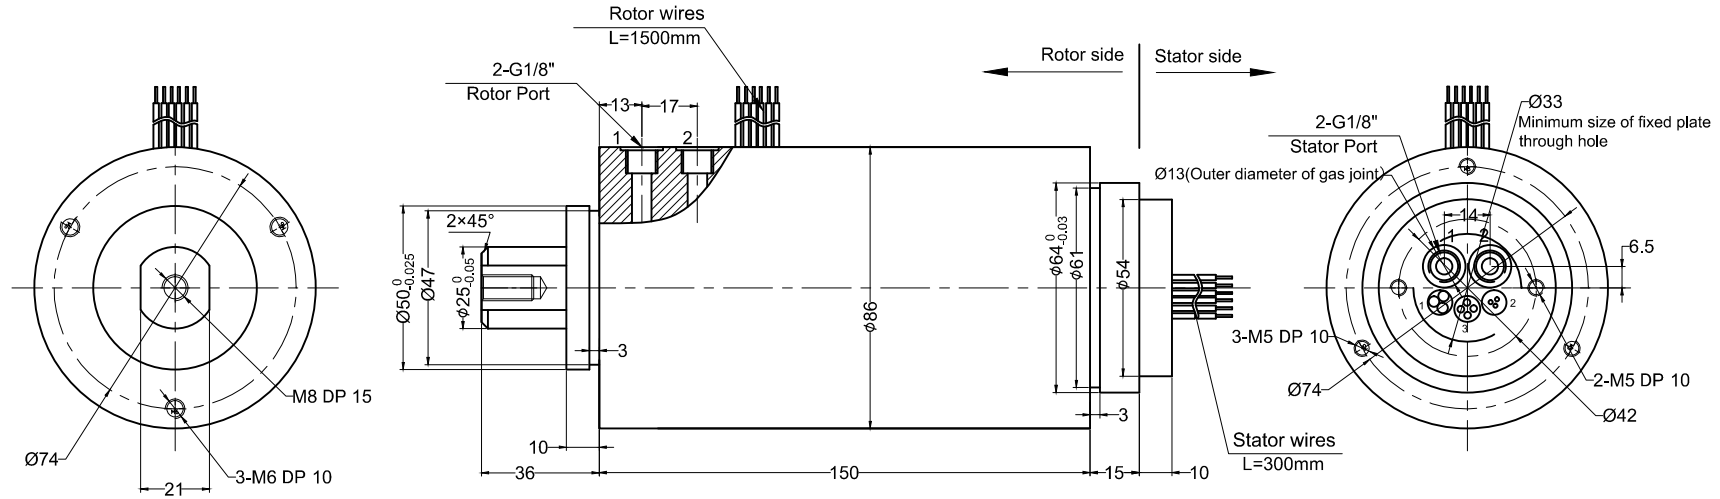

Technical parameters of rotary joint

1 Pressure	Max 1 Mpa	2 Passage	2 passage Air
3 Texture of material	Aluminium alloy	4 Tracheal connector	G1/8"
5 Media type	Compressed air		

Electrical Specification

1 Rings	11	2 Current	Power module: 3 rings 30A Signal module: 3 rings signal + 1 channel Profinet signal
3 Voltage	0~600VDC/VAC		
4 Insulation Resistance	1000M Ω @1000VDC		
5 Electrical noise	Max.5m Ω ;		
6 Dielectric strength	1000VAC@50Hz;60S		

Mechanical Specification

7 Speed	0~50RPM;	8 Torque	Max.3 N.M;
9 Typical Life	10million revolutions, but strongly depends on your working conditions		

Environmental adaptability

10 Working temperature	-20 $^{\circ}$ C~+80 $^{\circ}$ C	11 Storage temperature	-35 $^{\circ}$ C~+85 $^{\circ}$ C
12 humidity	85 \pm 3%(30 $^{\circ}$ C+5 $^{\circ}$ C)		
13 Rush	40g, 11ms, Half sine wave, Vertical direction 3 times, Level 3 times		
14 IP Class	IP51		

Material/Attachment

15 Contact Material	noble metal	16 Housing material	ALL Alloy + Carbon Steel
17 Lead wire	Rotor: (See wiring diagram) Stator: (See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		2 passage Air+3 rings 30A +3 rings signal +1 channel Profinet Signal	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		DECIMAL X \pm 1		MODEL RX01021004	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX \pm .03		SIZE A	
FILLETS R.015 FINISH \checkmark		XXX \pm .005		R E V. A / 0	
THIRD ANGLE PROJECTION		FRACTIONAL 1/16		SCALE 1:1	
		ANGULAR \pm 1 $^{\circ}$		UNIT mm	

