
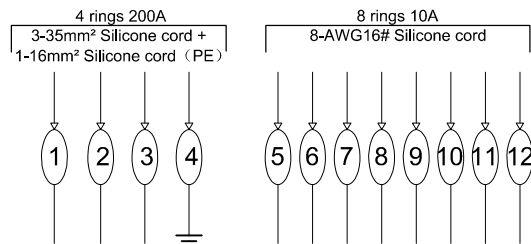


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.  
COPY RIGHT@2020 RION TECHNOLOGY

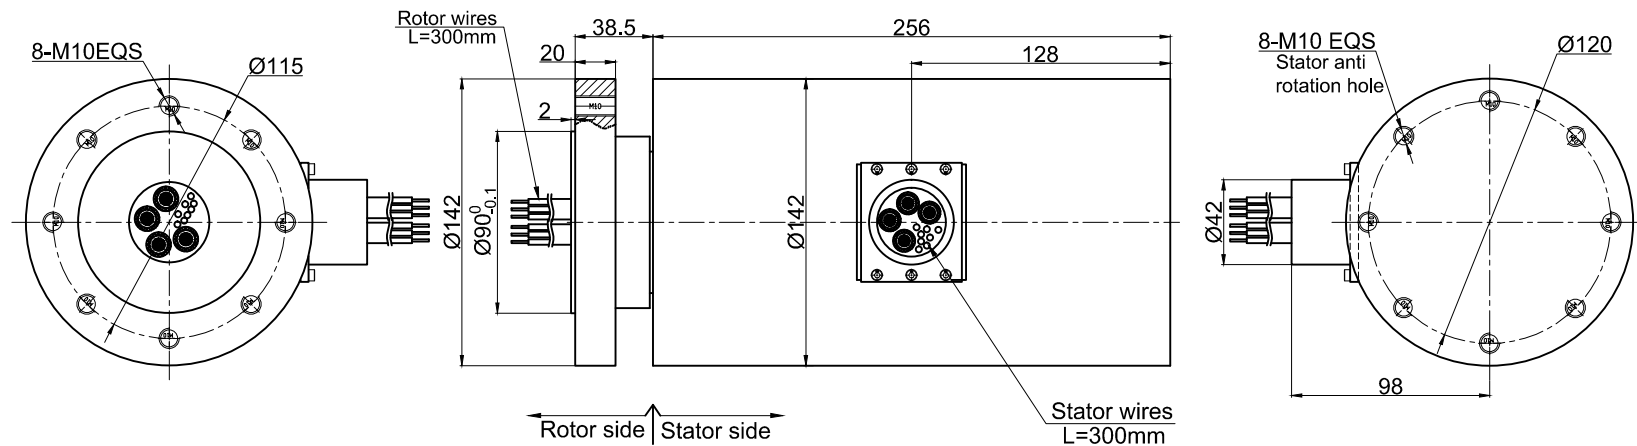

UNLESS OTHERWISE SPECIFIED		4 Rings 200A + 8 Rings 10A	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		TOLERANCES (EXCEPT AS NOTED)	
2.MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL RX01021005	
FILLETS R.015		DECIMAL X±.1	
FINISH ✓		XX±.03	
THIRD ANGLE PROJECTION		XXX±.005	
		FRACTIONAL±1/16	
		ANGULAR±1°	
		RION	
		SIZE A	
		R E V. A / 0	
		SCALE 1:1	
		UNIT mm	

#### Electrical Specification

1 Rings	12	2 Current	Power module: 4 rings 200A + 8 rings 10A
3 Voltage	0-380VDC/VAC		
4 Insulation Resistance	500MΩ@500VDC		
5 Electrical noise	Max.5mΩ;		
6 Dielectric strength	800VAC@50Hz;60S		

#### Mechanical Specification

7 Speed	0~250RPM;	8 Torque	Max.0.1 N.M;
9 Typical Life	15million revolutions, but strongly depends on your working conditions		

#### Environmental adaptability

10 Working temperature	-30℃~+80℃	11 Storage temperature	-35℃~+85℃
12 humidity	85±3%(30℃+5℃)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		

#### Material/Attachment

15 Contact Material	noble metal	16 Housing material	ALL Alloy
17 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		