
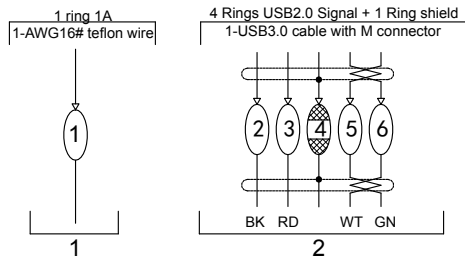


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

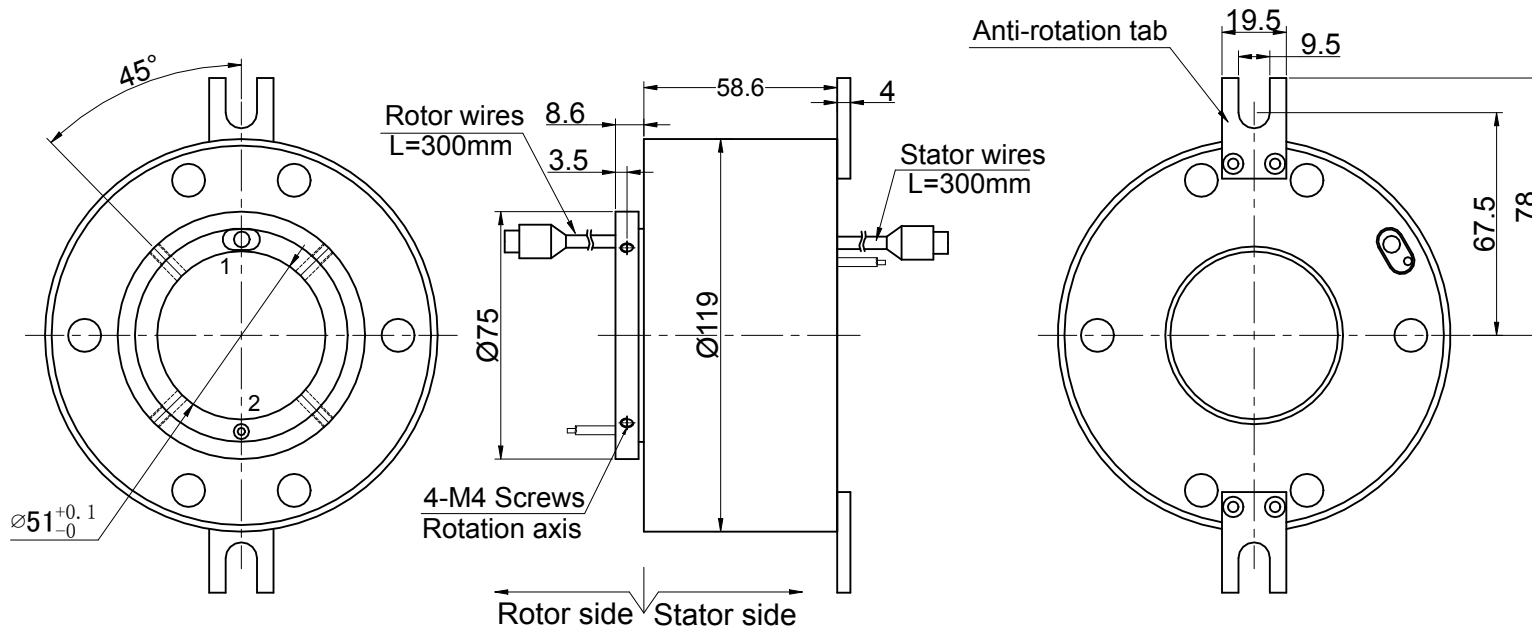

| | | | |
|--|---------------------|----------------------------------|-----|
| UNLESS OTHERWISE SPECIFIED | | 1 ring 1A + 1 channel USB signal | |
| 1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR | | TOLERANCES (EXCEPT AS NOTED) | |
| 2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT | | MODEL RX01223001 | |
| DECIMAL Xx.1 | | SIZE | A |
| XXx.03 | | RE.V. | A/0 |
| XXXx.005 | | SCALE | 1:1 |
| FILLET R.015 | FINISH \checkmark | UNIT | mm |
| THIRD ANGLE PROJECTION | | RION | |
| FRACTIONAL±1/16 | | ANGULAR±1° | |

| | | | |
|----------------------------|--|------------------------|------------------------------|
| Electrical Specification | | | |
| 1 Rings | 6 | 2 Current | Signal module:1 rings 1A |
| 3 Voltage | 0-300VDC/VAC | +1 channel USB signal | |
| 4 Insulation Resistance | 500MΩ@500VDC | | |
| 5 Electrical noise | Max.10mΩ; | | |
| 6 Dielectric strength | 500VAC@50Hz;60S | | |
| Mechanical Specification | | | |
| 7 Speed | 0~1000RPM; | 8 Torque | Max.0.2 N.M; |
| 9 Typical Life | 50million revolutions, but strongly depends on your working conditions | | |
| Environmental adaptability | | | |
| 10 Working temperature | 30℃~+80℃ | 11 Storage temperature | -35℃~+85℃ |
| 12 humidity | 85±3%(30℃+5℃) | | |
| 13 Rush | 40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times | | |
| 14 IP Class | IP54 | | |
| Material/Attachment | | | |
| 15 Contact Material | noble metal | 16 Housing material | AL Alloy+Engineering+plastic |
| 17 Lead wire | Rotor:(See wiring diagram) Stator:(See wiring diagram) | | |