
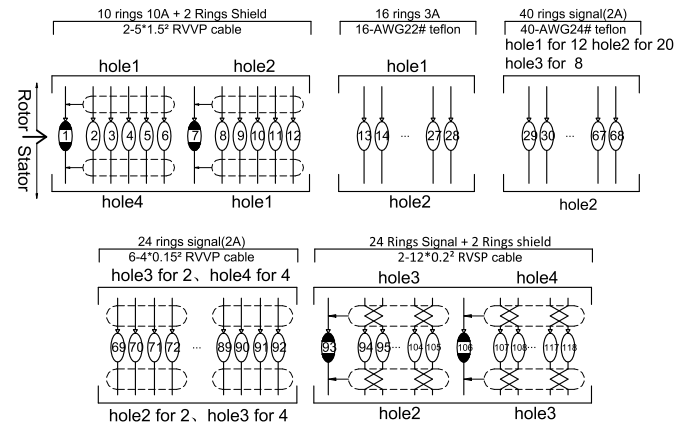


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

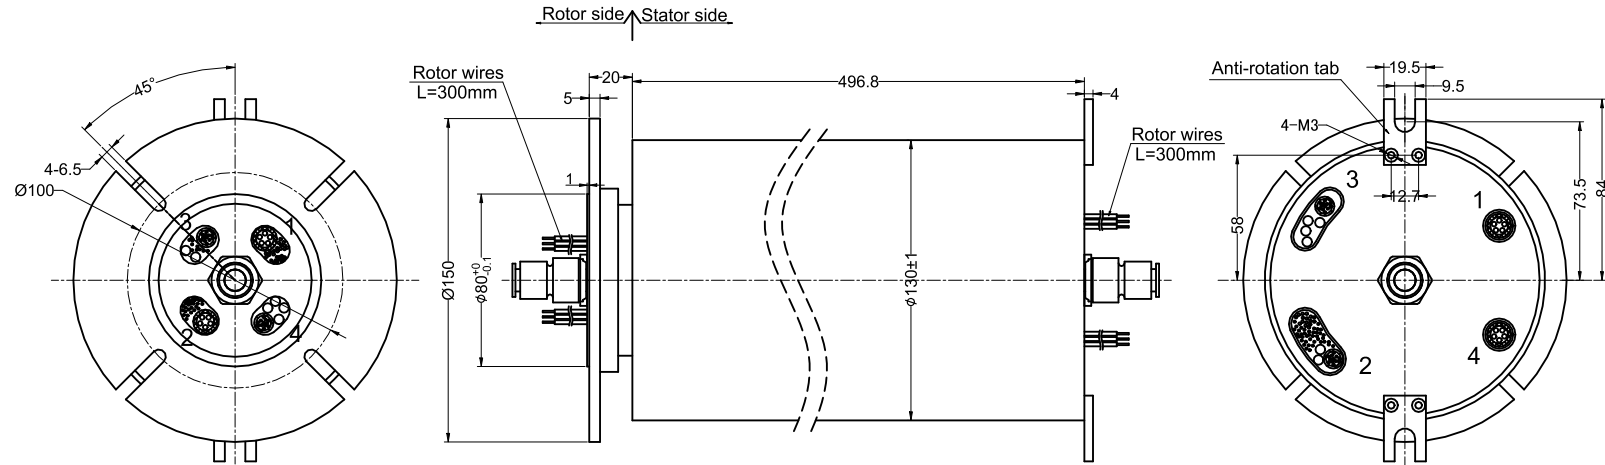

Technical parameters of rotary joint			
1 Pressure	Max 1 Mpa	2 Passage	1 passage Air
3 Texture of material	Aluminium alloy	4 Tracheal connector	G3/8"
5 Media type	Compressed air		
Electrical Specification			
1 Rings	118	2 Current	Signal module:10 rings;10A/ring +16 rings;3A/ring
3 Voltage	0-380VDC/VAC		Signal module:88 rings + 4 rings shield
4 Insulation Resistance	500MΩ@600VDC		
5 Electrical noise	Max.6mΩ;		
6 Dielectric strength	800VAC@50Hz;60S		
Mechanical Specification			
7 Speed	0~250RPM;	8 Torque	Max.0.8N.M;
9 Typical Life	10million revolutions, but strongly depends on your working conditions		
Environmental adaptability			
10 Working temperature	-30℃~+80℃	11 Storage temperature	-35℃~+85℃
12 humidity	85±3%(30℃+5℃)		
13 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
14 IP Class	IP51		
Material/Attachment			
15 Contact Material	noble metal	16 Housing material	AL Alloy
17 Lead wire	Rotor:(See wiring diagram) Stator:(See wiring diagram)		

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		DECIMAL X±.1	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03	
FILLET R.015	FINISH	XXX±.005	
THIRD ANGLE PROJECTION		FRACTIONAL ±1/16	
		ANGULAR ±1°	
10 rings 10A + 16 rings 3A + 88 rings + 4 rings shield MODEL: RX01225001			
		SIZE	A
		RE.V.	A/0
		SCALE	1:1
		UNIT	mm