


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

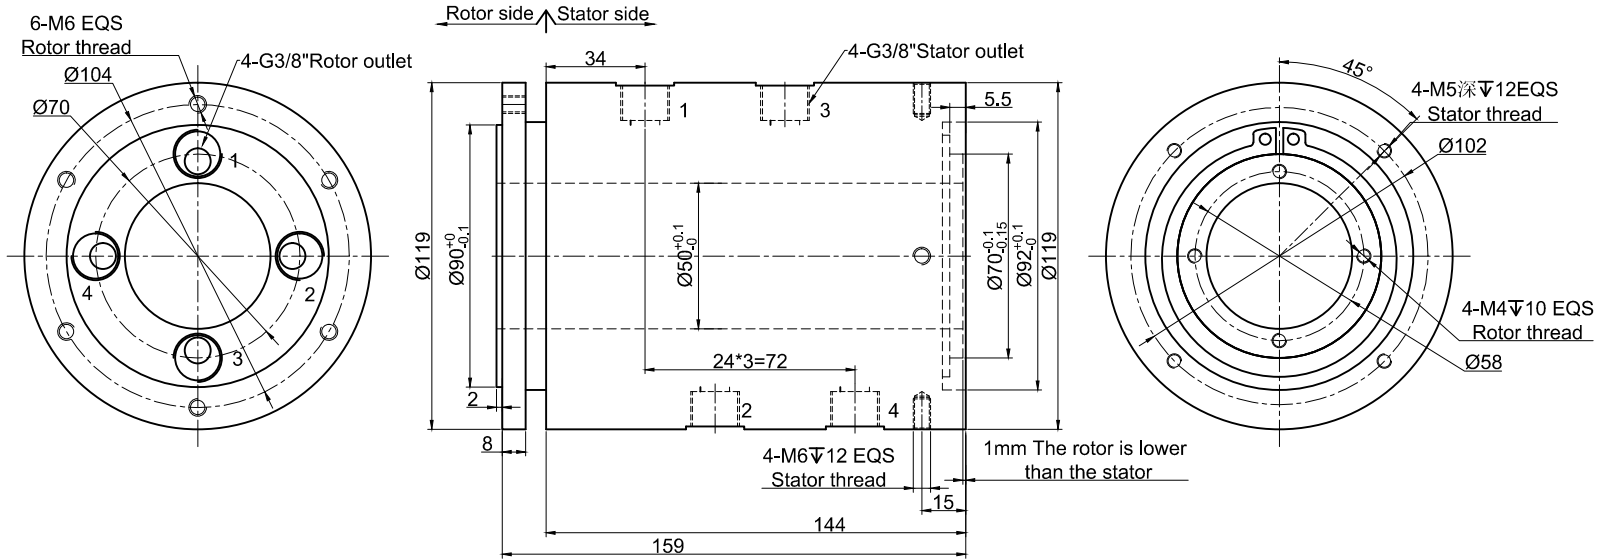

UNLESS OTHERWISE SPECIFIED		2 passage Gas	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES (EXCEPT AS NOTED)	
2.MATERIAL &FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL RJ4050-04	
FILLETS R.015 FINISH <input checked="" type="checkbox"/>		DECIMAL X \pm 1 XX \pm .03 XXX \pm .005	
THIRD ANGLE PROJECTION <input checked="" type="checkbox"/>		SIZE A	
		RION	
		R.E.V. A/0	
		SCALE 1:1	
		UNIT mm	
		FRACTIONAL \pm 1/16 ANGULAR \pm 1°	

Technical parameters of rotary joint			
1 Pressure	Max 1 Mpa	2 Passage	4 passage Gas
3 Torque	Max.3 N.M;	4 Tracheal connector	G3/8"
5 Media type	Compressed air	6 Working temperature	-30℃~+80℃
7 Speed	0-250RPM	8 Storage temperature	-35℃~+85℃
9 Texture of materia	ALL Alloy		