


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

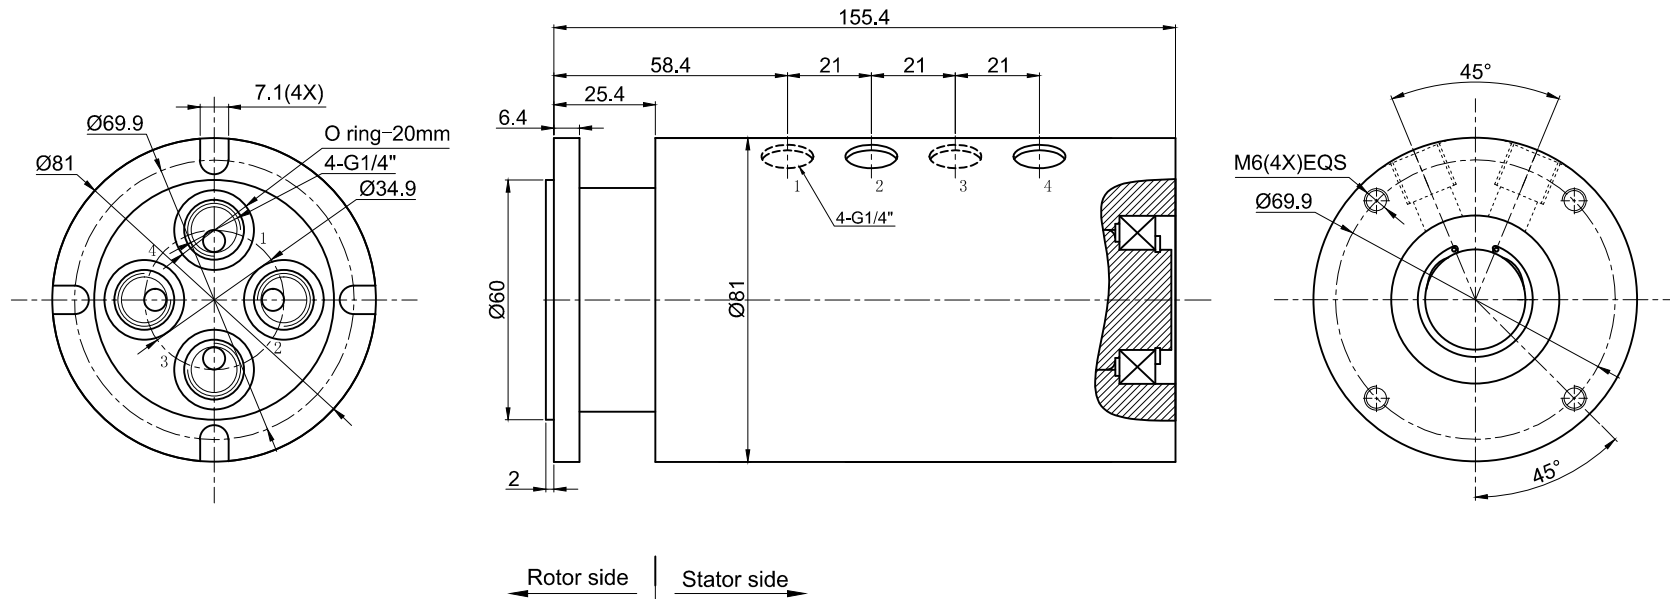

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		4 passage Hydraulic oil	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		MODEL		RX00720001	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		DECIMAL	X±.1 XX±.03 XXX±.005	SIZE	A
FILLET R.015	FINISH	FRACTIONAL±1/16		RE V.	A / 0
THIRD ANGLE PROJECTION		ANGULAR±1°		SCALE	1:1
				UNIT	mm

RION

Technical parameters of rotary joint

1 Pressure	Max 50 Mpa	2 Passage	4 passage Oil
3 Torque	Max.10 N.M;	4 Tracheal connector	G1/4"
5 Media type	Compressed air , water	6 Working temperature	-30℃~+80℃
7 Speed	0-10RPM	8 Storage temperature	-35℃~+85℃
9 Texture of materia	SS304+Wear resistant coating treatment		