


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

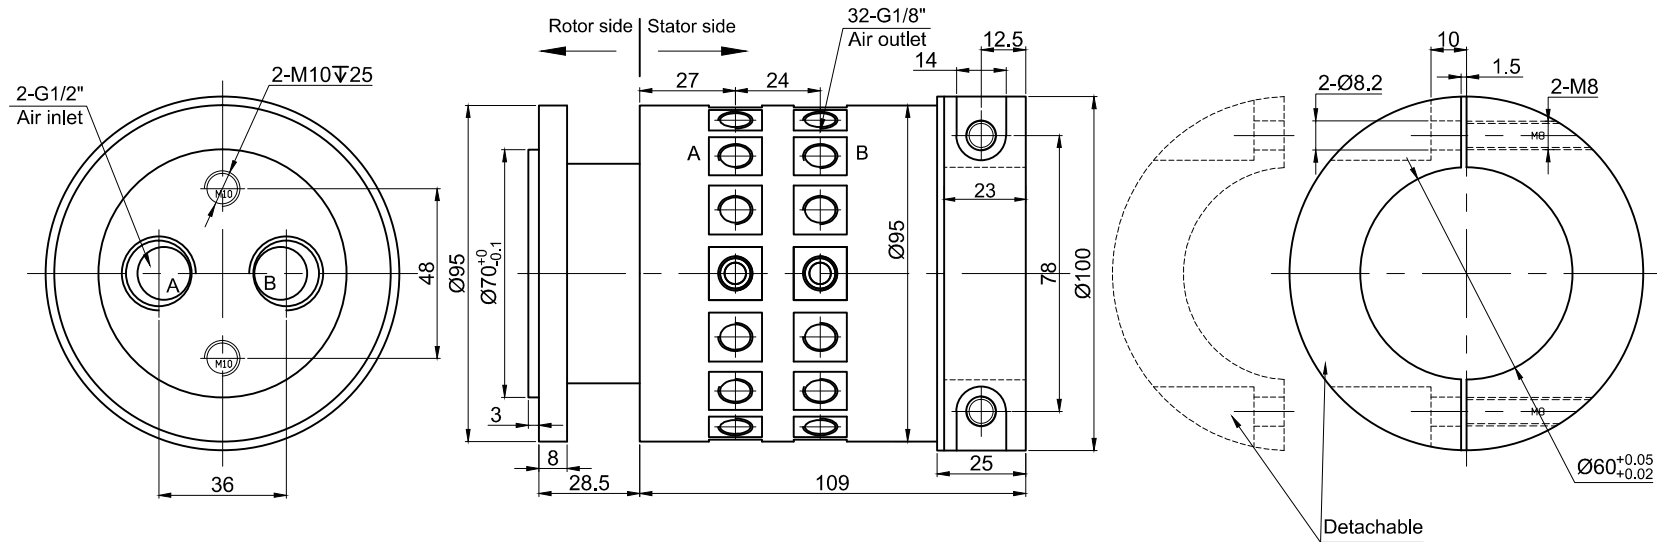

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		2 passage in and 32 passage out	
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR		DECIMAL X±.1		MODEL RX00727002	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		XX±.03		SIZE A	
FILLETS R.015 FINISH ✓		XXX±.005		R.E.V. A / 0	
THIRD ANGLE PROJECTION		FRACTIONAL ±1/16		SCALE 1:1	
ANGULAR ±1°		RION		UNIT mm	

Technical parameters of rotary joint			
1	Pressure	Max 1 Mpa	2 Passage
3	Torque	Max. 5N.M;	4 Tracheal connector
5	Media type	Compressed air	6 Working temperature
7	Speed	0-100RPM	8 Storage temperature
9	Housing material	Main shaft special steel + wear-resistant coating treatment, shell material aluminum alloy.	2 passage in and 32 passage out
			2*G1/2"+32*G1/8"
			-30℃~+80℃
			-35℃~+85℃