
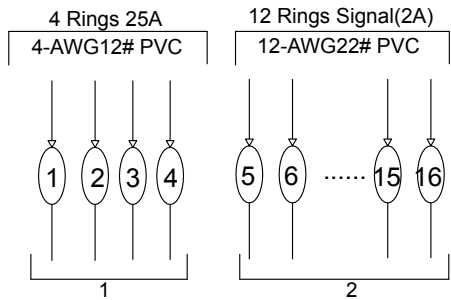


THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2020 RION TECHNOLOGY

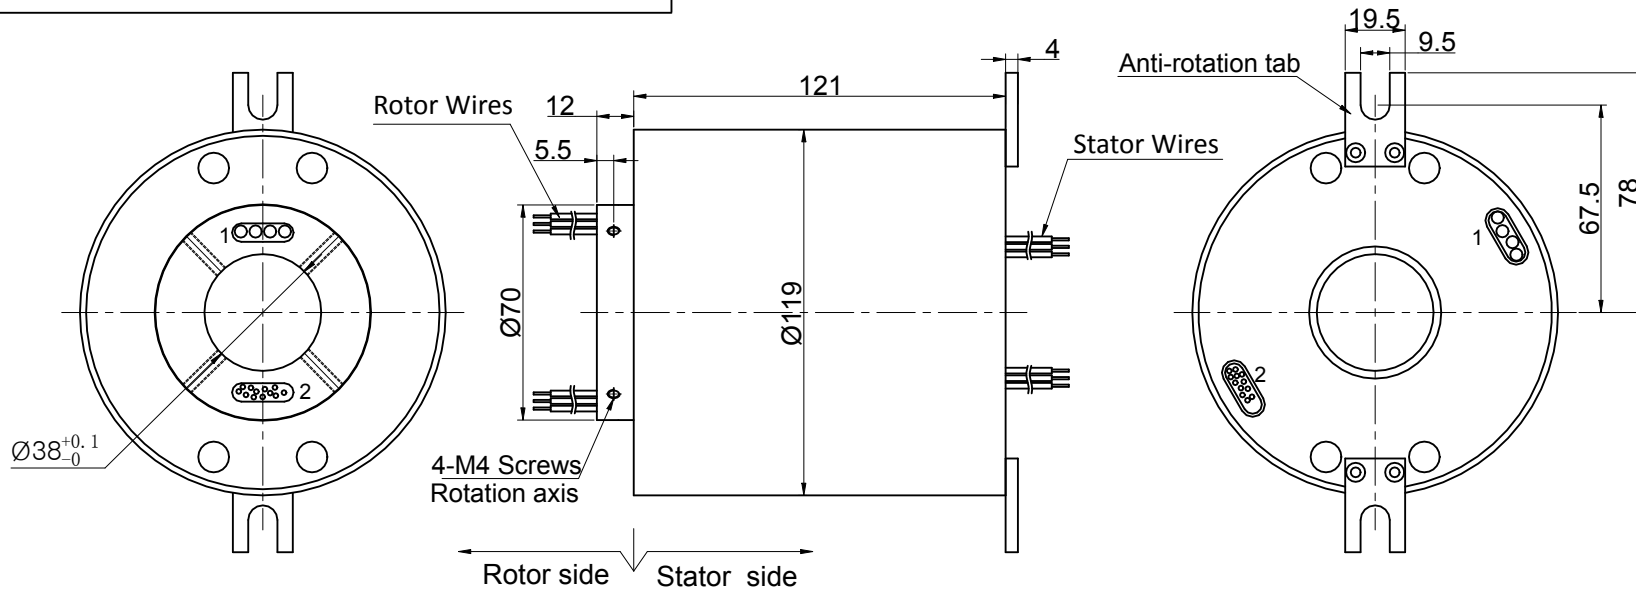

UNLESS OTHERWISE SPECIFIED		4 Rings 25A+12 rings 2A Signal	
1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR		TOLERANCES (EXCEPT AS NOTED)	
2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT		MODEL RX01231005	
DECIMAL Xs.1	XXs.03	SIZE	A
FILLETES R.015	FINISH \checkmark	RE.V.	A/0
THIRD ANGLE PROJECTION		SCALE	1:1
FRACTIONAL $\pm 1/16$		UNIT	mm
ANGULAR $\pm 1^\circ$		RION	

Electrical Specification

1 Rings	16	2 Current	Power module:4 rings, 25A/ring Signal module:12 rings, MAX:5A/ring
2 Voltage	0-380VDC/VAC		
3 Insulation Resistance	500M Ω @500VDC		
4 Electrical noise	Max.10m Ω ;		
5 Dielectric strength	500VAC@50Hz;60S		

Mecchanical Specification

6 Speed	0~250RPM;	7 Torque	Max:1.5 N.M;
8 Typical Life	10million revolutions, but strongly depends on your working conditions		

Environmental adaptability

9 Working temperature	-40 $^\circ$ C~+80 $^\circ$ C	10 Storage temperature	-45 $^\circ$ C~+85 $^\circ$ C
11 humidity	85 \pm 3%(30 $^\circ$ C+5 $^\circ$ C)		
12 Rush	40g,11ms,Half sine wave, Vertical direction 3 times,Level 3times		
13 IP Class	IP65		

Material/Attachment

14 Contact Material	noble metal	15 Housing material	All Alloy
16 Lead wire	Rotor:300mm(See wiring diagram) Stator:300mm(See wiring diagram)		