
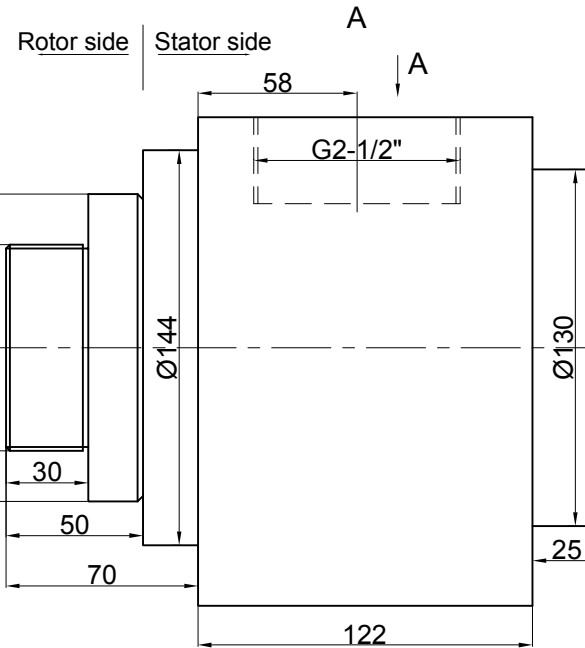
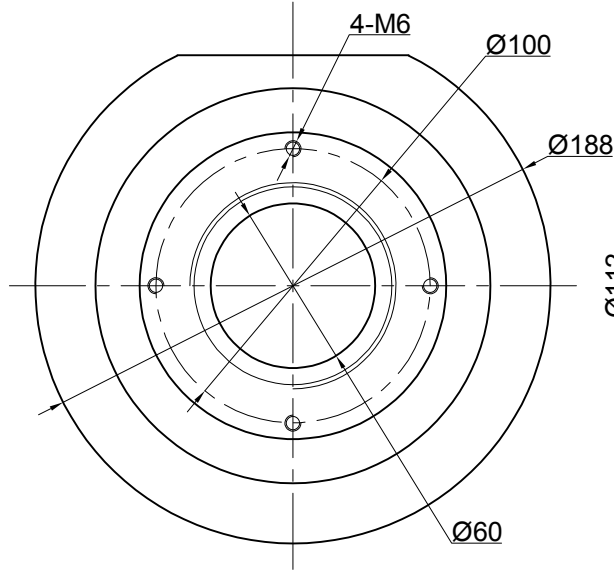



MARK	ECN NO.	Modify	Approve	DATE

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

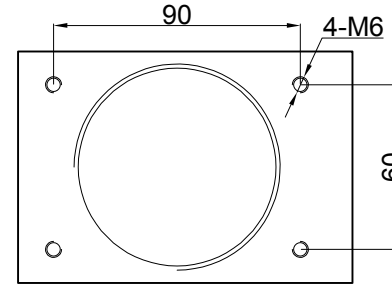

UNLESS OTHERWISE SPECIFIED		TOLERANCES (EXCEPT AS NOTED)		1 passage		
1. ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES & DEBURR.		SIZE RANGE	TOLERANCE	MODEL	RX26061003	
2. MATERIAL & FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.		X < 6	±0.1		SIZE	A
FILLETS R.015		6 ≤ X < 30	±0.2		RE V.	A / 0
FINISH		30 ≤ X < 120	±0.3		SCALE	1:1
THIRD ANGLE PROJECTION		120 ≤ X < 400	±0.5		UNIT	mm
		400 ≤ X < 1000	±0.8	FRACTIONAL ±1/16		
		1000 ≤ X	±1.2	2.2 ANGULAR ±1° (2,2)		

Technical parameters of rotary joint

1	Pressure	-70 kPa	2	Passage	1 passage
3	Torque	Max. 20 N·m;	4	Tracheal connector	G2-1/2"
5	Media type	Negative pressure	6	Working temperature	-30°C~+80°C
7	Speed	0-20RPM	8	Storage temperature	-35°C~+85°C
9	Texture of materia	Al Alloy			