

| MARK | ECN NO. | Modify | Approve | DATE |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |

THIS DOCUMENT IS THE PROPERTY OF RION TECHNOLOGY(SHENZHEN) LTD.(HEREAFTER"RION"),IT IS LENT AND IS TO BE RETURNED UPON REQUEST,THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO RION,THIS DOCUMENT NOR ITS CONTENTS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIAED PERSON COPIED OR PUBLISHED WITHOUT RION PRIOR WRITTEN CONSENT.
COPY RIGHT@2026 RION TECHNOLOGY

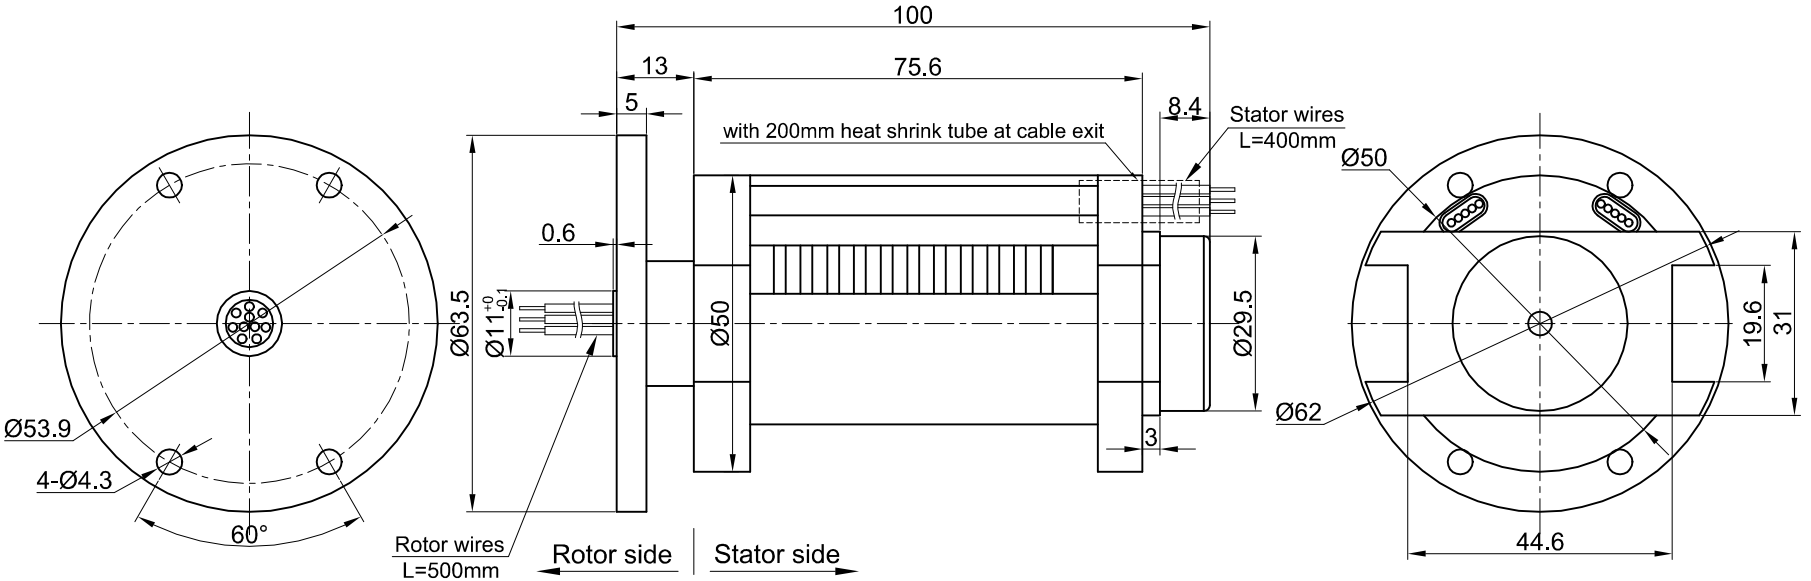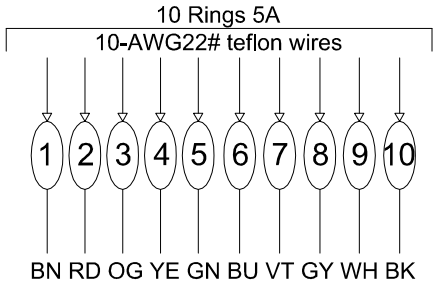


## Electrical Specifications

| | | | | | |
|---|---|---|---|---|---|
| 1 | Rings | 10 | 2 | Current | Power module: 10 Rings 5A |
| 3 | Voltage | 0~1000VAC / VDC | | | |
| 4 | Insulation Resistance | ⩾500MΩ@1000VDC | | | |
| 5 | Electrical noise | Max.10mΩ | | | |
| 6 | Dielectric strength | 1200VAC@50Hz;60s | | | |

## Mechanical Specification

| | | | | | |
|---|---|---|---|---|---|
| 7 | Speed | 0~250 rpm | 8 | Torque | MAX 0.2 N·m |

## Environmental adaptability

| | | | | | |
|---|---|---|---|---|---|
| 9 | Working temperature | -30℃~+80℃ | 10 | Storage temperature | -35℃~+85℃ |
| 11 | Humidity | 85±3%RH(30℃+5℃) | | | |
| 12 | Shock | 40g,11ms,Half sine wave, Vertical 3 times,Horizontal 3 times | | | |
| 13 | IP rating | IP41 | | | |

## Material/Attachment

| | | | | | |
|---|---|---|---|---|---|
| 14 | Contact Material | Noble metal | 15 | Housing material | Al alloy + Stainless steel |
| 16 | Lead wire | Rotor:(See wiring diagram) Stator:(See wiring diagram) | | | |

UNLESS OTHERWISE SPECIFIED

1.ALL DIMENSIONS ARE IN MM HES BREAK SHARP EDGES &DEBURR.

2.MATERIAL&FINISH TO BE AS NOTED OR SUBSTITUTED WITH AN APPROVED AND TESTED EQUIVALENT.

FILLETS R.015 FINISH

THIRD ANGLE PROJECTION

TOLERANCES (EXCEPT AS NOTED)

| SIZE RANGE | TOLERANCE |
|---|---|
| X < 6 | ±0.1 |
| 6 ≤ X < 30 | ±0.2 |
| 30 ≤ X < 120 | ±0.3 |
| 120 ≤ X < 400 | ±0.5 |
| 400 ≤ X < 1000 | ±0.8 |
| 1000 ≤ X | ±1.2 |

FRACTIONAL±1/16
ANGULAR±1°
(13,13)

10 Rings 5A

MODEL RX26101908

RIONSR

| | |
|---|---|
| SIZE | A |
| REV. | A / 0 |
| SCALE | 1:1 |
| UNIT | mm |